




► Economy Range T80 - 450V (White)

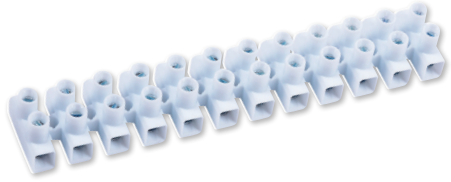

Specification - Max working temp 80°C

List No.	Amps	Size	Pack Qty
PN2	2.5A	1.0-4mm ²	10
PN5	5A	1.5-6mm ²	10
PN15	15A	2.5-10mm ²	10
PN30	30A	4.0-16mm ²	10
PN50	60A	6.0-25mm ²	10

► Nylon-PA T110 - 450V (Natural)



Standard of Compliance - Self extinguishing: BS EN 60998-1

Specification -

- Snap free • Flame tested UL94 V0
- Max cont temp rating 110°C • Glow wire tested 850°C

Certified -

List No.	Amps	Size	Pack Qty
NYN5	5A	1.5-6mm ²	10
NYN15	15A	2.5-10mm ²	10
NYN30	30A	4.0-16mm ²	10

► Thermoplastic T80 - 450V (White)



Standard of Compliance -

Self extinguishing: BS EN 60998-1

Specification -

- Snap free • Max cont temp rating 80°C
- Flame tested UL94 V2 • Max short period temp rating 110°C
- Glow wire tested 850°C

Certified -

List No.	Amps	Size	Pack Qty
PN2TCE	2.5A	1.0-4mm ²	10
PN5TCE	5A	1.5-6mm ²	10
PN15TCE	15A	2.5-10mm ²	10
PN30TCE	30A	4.0-16mm ²	10

► Nylon-PA T150 - 450V (Brown)



Standard of Compliance - Self extinguishing: BS EN 60998-1

Specification -

- Snap free • Flame tested UL94 V0
- Glow wire tested 850°C
- Max cont temp rating 150°C (180°C peak)

Certified -

List No.	Amps	Size	Pack Qty
BS5	5A	1.0-4mm ²	10
BS15	15A	2.5-10mm ²	10

► T280 - 450V (1 Pole)



Standard of Compliance -

BS EN 60998-1/EN60335

Specification -

- These articles are non-inflammable
- Maximum ambient temperature 280°C

List No.	Amps	Pack Qty
PC51	5A	100
PC151	15A	100
PC301	30A	100

► T280 - 450V (2 Pole)



Standard of Compliance -

BS EN 60998-1/EN60335

Specification -

- These articles are non-inflammable
- Maximum ambient temperature 280°C

List No.	Amps	Pack Qty
PC52	5A	100
PC152	15A	100
PC302	30A	50

► T280 - 450V (2 Pole, Centre fixing)



Standard of Compliance -

BS EN 60998-1/EN60335

Specification -

- 'C' Denotes centre fixing
- These articles are non-inflammable
- Maximum ambient temperature 280°C

List No.	Amps	Pack Qty
PC52C	5A	100
PC152C	15A	100
PC302C	30A	50

► T280 - 450V (3 Pole)



Standard of Compliance -

BS EN 60998-1/EN60335

Specification -

- These articles are non-inflammable
- Maximum ambient temperature 280°C

List No.	Amps	Pack Qty
PC53	5A	100
PC153	15A	100