


# TUBES

## S15

- Perfect incandescent replacement
- 90% energy saving
- >30,000 switching cycles
- Ideal for bathroom shaver sockets and under cabinet lighting



CAT NO.	SIZE	LUMENS	WATTAGE	EFFICACY Lm/W	BEAM ANGLE	EQUIVALENT WATTAGE	INNER QUANTITY	OUTER QUANTITY
LS15W2W20-01	221mm	200	2.5W	80	140°	20W	10	50
LS15W4W28-01	284mm	280	4W	70	140°	28W	10	50

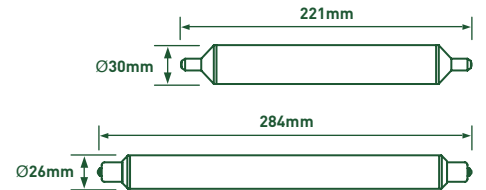

# TUBES

## T8

- 50% energy saving against fluorescent for similar lux levels
- Retrofit with most T8 luminaires (non-dimming)
- Shorted end, supplied with dummy replacement LED starter
- Composite / Thermoplastic construction
- Integrated Constant Current driver
- Operating temperature environment is -20°C to 40°C
- G13 cap
- Ignition time - <0.5 sec
- Start up time (95%) - <0.5 sec
- Tubes are powered from one end (fitting rewiring may be required)



CAT NO.	SIZE	LUMENS	WATTAGE	EFFICACY Lm/W	COLOUR TEMP	EQUIVALENT WATTAGE	OUTER QUANTITY
LT82N10W10	2ft/600mm	1000	10W	100	4000K	16W	25
LT82C10W10	2ft/600mm	1000	10W	100	6500K	16W	25
LT84N18W18	4ft/1200mm	1800	18W	100	4000K	30W	25
LT84C18W18	4ft/1200mm	1800	18W	100	6500K	30W	25
LT84N24W24	4ft/1200mm	2400	24W	100	4000K	36W	25
LT84C24W24	4ft/1200mm	2400	24W	100	6500K	36W	25
LT85N24W24	5ft/1500mm	2400	24W	100	4000K	36W	25
LT85C24W24	5ft/1500mm	2400	24W	100	6500K	36W	25
LT85N32W32	5ft/1500mm	3200	32W	100	4000K	45W	25
LT85C32W32	5ft/1500mm	3200	32W	100	6500K	45W	25
LT86N40W40	6ft/1800mm	4000	40W	100	4000K	70W	25
LT86C40W40	6ft/1800mm	4000	40W	100	6500K	70W	25

