
Tass Cable Management Limited | 7th Edition | 2017 Brochure

## **TFB3** Cavity Floor Boxes

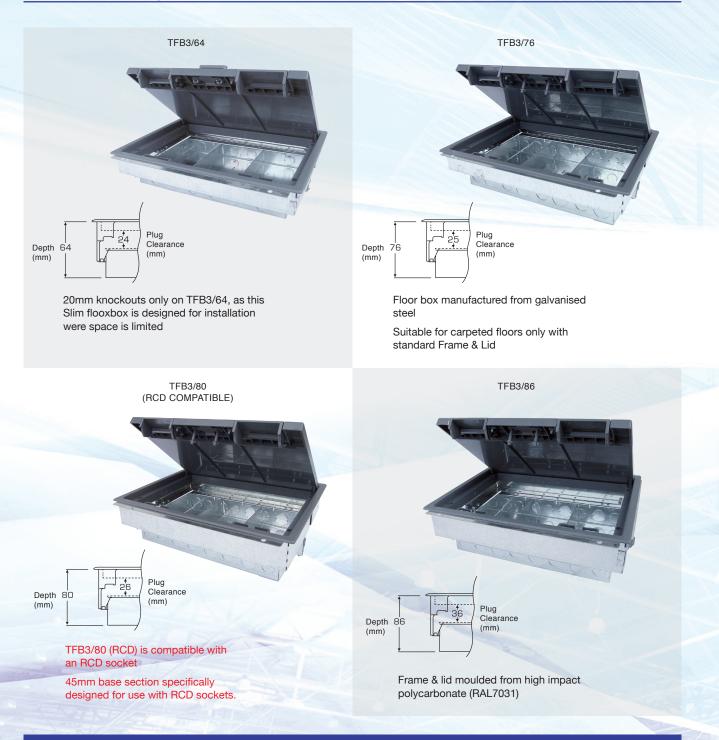

## Specifications TFB3 Range

- Floor box manufactured from galvanised steel
- 20 & 25mm knockouts to accept flexible conduit
- Frame & lid moulded from high impact polycarbonate (RAL7031)
- Galvanised lid insert for strength
- Easy grip recessed lifting handle
- Clean Earth Sockets available

- Compact design 303 x 221mm floor cut-out
- Clamp fixing for fast installation
- Large range of accessory plates, colour equivalent: RAL7035
- Suitable for carpeted floors only with standard Frame & Lid
- ABS Plastic Frame & Lid Load Test 550 KG
- Steel Frame & Lid Load Test 740 KG

Note: Due to our policy of continuous improvement, Tass Cable Management Ltd reserve the right to change product specifications without notice.

## TFB3 Cavity Floor Boxes



Standard depth 120 mm designed to accepts standard accessory plates from electrical wholesalers

Model	Description	Depth	Plug Clearance	Frame & Lid	Plate Size	Floor Cutout
TFB3/64	3 Compt Cavity Floorbox	64mm	24mm	313 x 230mm	185 x 89mm	303 x 221mm
TFB3/76	3 Compt Cavity Floorbox	76mm	25mm	313 x 230mm	185 x 89mm	303 x 221mm
TFB3/80 (RCD)	3 Compt Cavity Floorbox	80mm	26mm	313 x 230mm	185 x 89mm	303 x 221mm
TFB3/86	3 Compt Cavity Floorbox	86mm	36mm	313 x 230mm	185 x 89mm	303 x 221mm
TFB3/120	3 Compt Cavity Floorbox	120mm	70mm	313 x 230mm	185 x 89mm	303 x 221mm

Note: Accessory Plates ST0286, ST0286/IFM, ST0287, ST0287/FM & ST0291/RCD not suitable for boxes below 80mm depth due to plug top and wiring clearance.