



PRW200




PRW201




PRW202



PRW203

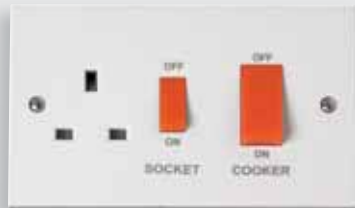

PRW204

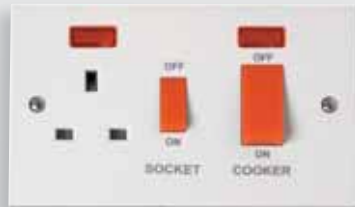

PRW205



PRW500



PRW501



PRW503



PRW505

45A Switches And Socket Outlets

- PRW200** 45A 1 Gang DP Switch
- PRW201** 45A 1 Gang DP Switch With Neon
- PRW202** 45A 2 Gang DP Switch
- PRW203** 45A 2 Gang DP Switch With Neon
- PRW204** 45A 2 Gang DP Switch With 13A DP Switched Socket
- PRW205** 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669, BS 4177
 Back Box Depth: 35mm Minimum Cable Size: 45A: 1 x 16mm²
 Dimensions: 1 Gang: (86mm x 86mm x 11mm), 2 Gang: (146mm x 86mm x 11mm)

45A Switches And Socket Outlets With White Rockers

- PRW500** 45A 1 Gang DP Switch With White Rocker
- PRW501** 45A 1 Gang DP Switch With White Rocker & Neon
- PRW502** 45A 2 Gang DP Switch With White Rocker
- PRW503** 45A 2 Gang DP Switch With White Rocker & Neon
- PRW504** 45A 2 Gang DP Switch With 13A DP Switched Socket & White Rockers
- PRW505** 45A 2 Gang DP Switch With 13A DP Switched Socket, White Rockers & Neons

Standards: BS EN 60669, BS 4177
 Back Box Depth: 35mm Minimum Cable Size: 45A: 1 x 16mm²
 Dimensions: 1 Gang: (86mm x 86mm x 11mm), 2 Gang: (146mm x 86mm x 11mm)