

Features & Benefits

Robust Construction

- Polycarbonate construction
- High impact resistance
- UV protected against fading
- Ergonomic Design
- Smooth operation of switches
- Neutral modern design suitable for most locations
- Flexible rubber base allows for mounting on most types of uneven surfaces

Multiple Gland Entry Position

- Multiple knockouts (20mm) for entry from all angles

Weatherproof - IP66

- Offers high level of protection against ingress of water jets and dust


Multiple Switch Configurations

- Designed to fit most Minigrid™ modules (13A Max)



MINIGRID®

The products illustrated in this section of the catalogue are furnished enclosures and unfurnished enclosures. For comprehensive information on the full range of modules available please refer to the Minigrid™ section of the catalogue.

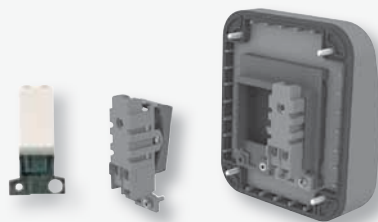

OA411AG / OA401AG



OA412AG / OA402AG

Aquip66®

IP66 Weatherproof Switches

- OA411AG** 10AX 1 Gang 2 Way IP66 Weatherproof Switch Unit
Fitted with a 2-way Minigrid™ module
- OA412AG** 10AX 2 Gang 2 Way IP66 Weatherproof Switch Unit
Fitted with 2 x 2-way Minigrid™ modules

IP66 Weatherproof Switch Enclosures

- OA401AG** 1 Gang IP66 Weatherproof Unfurnished Switch Unit
- OA402AG** 2 Gang IP66 Weatherproof Unfurnished Switch Unit
Minigrid™ Modules supplied separately

Standards: BS EN 60529 (Enclosure), BS EN 60669 (Switch) Knock-outs: 20mm Cable Size: 4 x 1.5mm², 1 x 6mm², 2 x 2.5mm²
Dimensions: From Front: 100mm (Height) x 85.5mm (Width) x 74mm (Depth - with Gasket)
From Rear: 105.5mm (Height) x 90.5mm (Width)