


# Insulation Sleeving

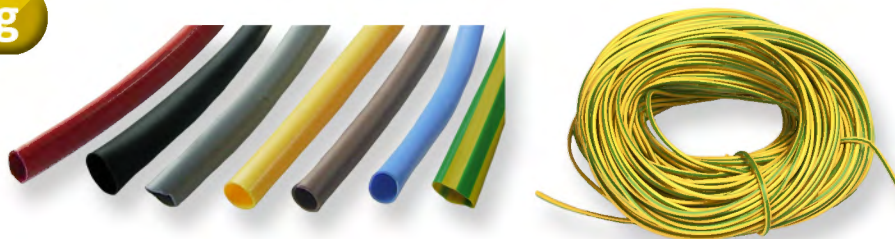

## PVC Sleeving

### Description:

PVC sleeving is supplied in a wide range of sizes and colours. In addition to the size range shown we can supply alternative diameters and wall thickness to meet particular applications as required.

A versatile material in common use ideal for cable or harnessing covering.

Continuous operating temp: -20°C to 70°C

Insulation resistance:  $10^{10}$  Ohm/cm

Dielectric Strength: 20kV/mm

Tensile Strength: 15MPa

Elongation at break: 220%

Hardness: BSS20-30

Flammability: Self-extinguishing

RoHS compliant

Hanks Part No.	Reel Part No.	Internal Diameter (mm)	Nominal Wall Thickness (mm)	Coil Size (metres)
<b>PVC1.5*</b>	N/A	1.5	0.5	100
<b>PVC2*</b>	PVC2*-REEL	2.0	0.5	100
<b>PVC3*</b>	PVC3*-REEL	3.0	0.5	100
<b>PVC4*</b>	PVC4*-REEL	4.0	0.5	100
<b>PVC5*</b>	N/A	5.0	0.5	100
<b>PVC6*</b>	N/A	6.0	0.5	100
<b>PVC8*</b>	N/A	8.0	0.5	100
<b>PVC10*</b>	N/A	10.0	0.5	100
<b>PVC12*</b>	N/A	12.0	0.5	100



Reel

\* Suffix Part No. with the colour required e.g. green/yellow = PVC3G/Y

NB. 85°C and 105°C rated sleeving only available to special order.

Can be supplied in alternative wall thickness or on reels to special order.

All sizes available in cut lengths (subject to minimum order quantities).

Standard colours: black (BLK), red (RED), blue (BLU), white (WHI), green/yellow (G/Y), brown (BRO), yellow (YEL) and grey (GRY).

Other sizes and colours available may be subject to minimum order - green, violet, orange, pink and clear.

### PVC Sleeving 5 metre Packs

Part No.			Colour
3mm Internal Diameter	4mm Internal Diameter	6mm Internal Diameter	
<b>BLK3-P5M</b>	<b>BLK4-P5M</b>	<b>BLK6-P5M</b>	Black
<b>BLU3-P5M</b>	<b>BLU4-P5M</b>	<b>BLU6-P5M</b>	Blue
<b>BR3-P5M</b>	<b>BR4-P5M</b>	<b>BR6-P5M</b>	Brown
<b>GREY3-P5M</b>	<b>GREY4-P5M</b>	<b>GREY6-P5M</b>	Grey
<b>RED3-P5M</b>	<b>RED4-P5M</b>	<b>RED6-P5M</b>	Red
<b>GY3-P5M</b>	<b>GY4-P5M</b>	<b>GY6-P5M</b>	Green/Yellow