
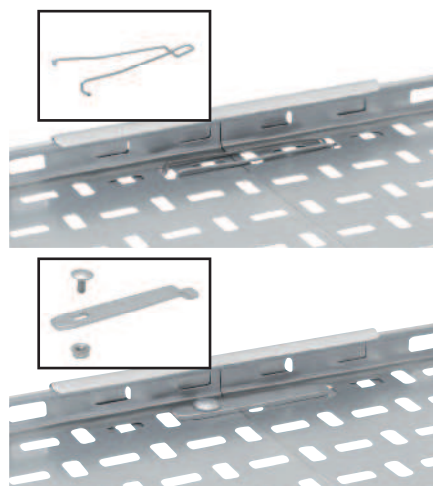


Swifts® MRF medium duty return flange cable tray

lengths and couplers

25

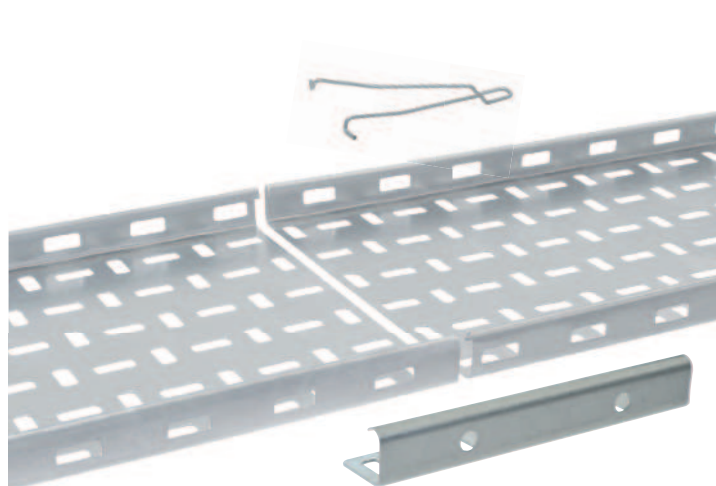

Selection charts **p. 12-13**
 Dimensions and technical information : lengths **p. 46** ; coupler sets and fixing options **p. 47-50** ; fittings **p. 51-63**
 Design notes **p. 118**
 Loading graphs **p. 46**

Pack	Cat. Nos.	Straight lengths – 3 m	
1	MRFL 50 F	Width (mm)	Depth (mm)
1	MRFL 75 F	50	25
1	MRFL 100 F	75	25
1	MRFL 150 F	100	25
1	MRFL 225 F	150	25
1	MRFL 300 F	225	25
1	MRFL 450 F	300	25
1	MRFL 600 F	450	25
1	MRFL 750 F	600	25
1	MRFL 900 F	750	25
		900	25

D finish is not available in 50 mm
 For technical information, **p. 46**

Pack	Cat. Nos.	Coupler sets
1	MRFC 50 F	Use to join straight lengths For technical information, p. 47-50
		Standard couplers For 50 mm wide tray
1	MRFC F	For 75-900 mm wide tray Supplied in pairs

Pack	Cat. Nos.	Fixing options
100	QBF	All fixing options to be used with standard coupler sets shown opposite
100	QBFS	Quick bolt fasteners Pack of 100 M6 x 12 quick bolt fasteners with power tool nut driver Dacromet finish Stainless steel finish For technical information, p. 48
10	SCLPG	Swiftclip Two Swiftclips required per MRFC One Swiftclip required per MRFC50 Used to join straight lengths with MRFC and MRFC50 coupler sets Can also be used to join lengths to fittings
10	SCLG	For use with PG tray up to and including 300 mm wide
		For use with G tray up to and including 300 mm wide For technical information, p. 47-48, 50
10	SGR	Swiftgrip For use with standard couplers Length to length connections only Reduces number of fixings required from four per side to one For use on all widths from 50 mm to 900 mm Two Swiftgrips required per MRFC One Swiftgrip required per MRFC50 For use with PG and G tray For technical information, p. 47-48

Additional gauges and finishes available to special order
 Contact us on +44 (0) 345 605 4333



Key : selecting MRF medium duty lengths and couplers. Replace the letters shown in **red** with your choice from the following options :
F = Finish : **G** (hot dip galvanised after manufacture),
D (deep galvanised), **PG** (pre-galvanised steel),
S (stainless steel), **E** (powder coated black RAL 9005)