

CW Premier Brass Cable Gland Pack

4 Part Outdoor




Application: Brass indoor and outdoor gland suitable for all types of steel wire armoured cable (SWA), providing an environmental seal on the outer cable sheath. The gland also provides mechanical cable retention and electrical continuity via armour wire termination.

Operating Temperature (standard seals): -20°C to +80°C

Ingress Protection: IP66 EN60529 Approval: BS EN 62444 : 2013

Gland only available on request.

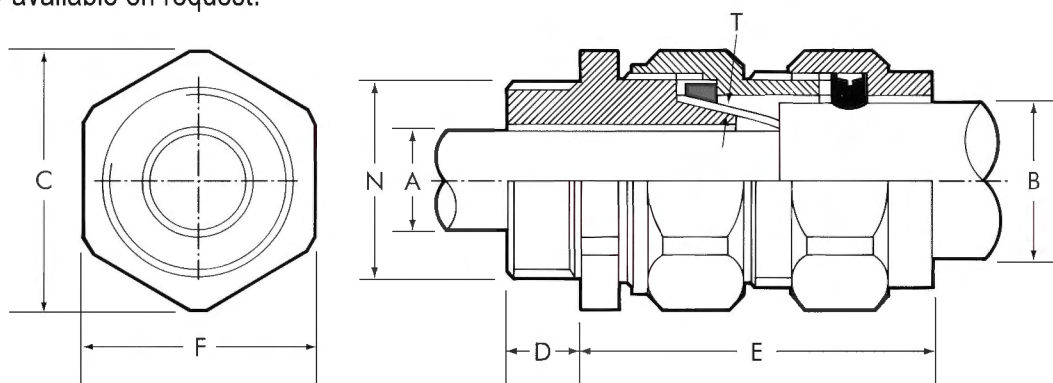

Part No.	Pack Quantity	Entry Thread		Cable Acceptance Details			Hexagonal Details		Assembled Length
		Diameter N	Length D	Diameter A min max	Diameter B min max	Armour wire size T	A/F F	A/C C	
CW20/16 PACK	2	20	10	9.0	8.4 - 13.8	0.90	22.0	24.4	38.0
CW20S PACK	2	20	10	8.0 - 11.8	12.9 - 15.8	0.90/1.25	24.0	26.6	40.0
CW20 PACK	2	20	10	11.0 - 13.8	15.5 - 20.8	0.90/1.25	30.0	33.3	41.0
CW25 PACK	2	25	10	13.0 - 19.8	20.3 - 27.5	1.25/1.60	38.0	42.2	44.0
CW32 PACK	2	32	10	19.0 - 26.4	26.7 - 33.5	1.60/2.00	46.0	51.0	48.0
CW40 PACK	1	40	15	25.0 - 32.4	33.0 - 40.9	1.60/2.00	55.0	61.0	52.0
CW50S PACK	1	50	15	31.5 - 38.0	39.4 - 46.3	2.00/2.50	60.0	66.6	55.0
CW50 PACK	1	50	15	36.5 - 44.0	45.7 - 52.6	2.00/2.50	65.0	72.1	55.0
CW63S PACK	1	63	15	42.5 - 49.0	52.1 - 61.5	2.50	75.0	83.2	60.0
CW63 PACK	1	63	15	48.5 - 55.5	58.4 - 65.3	2.50	80.0	88.8	60.0
CW75S PACK	1	75	20	54.5 - 62.0	64.8 - 73.0	2.50	90.0	100.0	65.0
CW75 PACK	1	75	20	60.5 - 67.0	71.0 - 78.0	2.50	95.0	105.4	65.0
CW90 PACK	1	*90	20	66.0 - 79.0	77.0 - 90.0	2.50/3.15	110.0	122.1	70.0

All dimensions are in mm. *Not included in BS 6121

Pack content: Gland(s), steel locknut(s), earth tag(s) and shroud(s).

Packs are also available with Low-smoke LSF shroud or Low Smoke Zero-halogen LSZH shroud - Suffix above part numbers with either -LSF or -LSZH