

Cable Glands



PEX® BW Commercial Brass Cable Gland Pack


2 Part Indoor

Application: Brass indoor gland suitable for all types of steel wire armoured cable (SWA), providing mechanical cable retention and electrical continuity via armour wire termination.

Operating Temperature: -80°C to + 300°C

Ingress Protection: IP2X EN60529

Approval: BS 6121 Part 1:2005

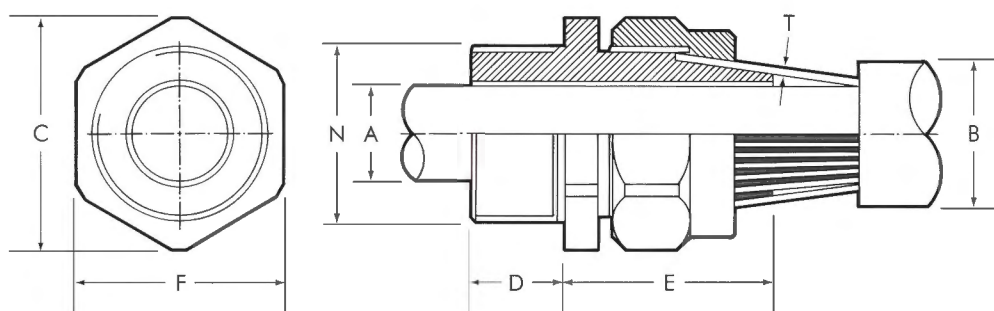

Part No.	Pack Quantity	Entry Thread		Cable Acceptance Details			Hexagonal Details		Assembled Length
		Diameter N	Length D -	Diameter A max	Diameter B max	Armour wire size T	A/F F	A/C C	
PBW20S PACK	2	20	10	11.8	15.8	0.90/1.25	22.0	24.4	16.0
PBW20 PACK	2	20	10	13.8	19.5	0.90/1.25	25.0	27.7	17.0
PBW25 PACK	2	25	10	19.8	27.0	1.25/1.60	33.0	36.6	18.0
PBW32 PACK	2	32	10	26.4	33.5	1.60/2.00	40.0	44.4	21.0
PBW40 PACK	1	40	15	32.4	40.1	1.60/2.00	48.0	53.3	23.0
PBW50S PACK	1	50	15	38.0	46.3	2.00/2.50	56.0	62.2	24.0
PBW50 PACK	1	50	15	44.0	52.6	2.00/2.50	62.5	69.4	25.0
PBW63S PACK	1	63	15	49.0	61.5	2.50	70.0	77.7	26.0
PBW63 PACK	1	63	15	56.2	65.5	2.50	76.0	84.4	28.0
PBW75S PACK	1	75	15	62.0	71.6	2.50	85.0	94.4	36.0

All dimensions are in mm.

Pack content: Gland(s), steel locknut(s), earth tag(s) and shroud(s).

Packs are also available with Low-smoke LSF shroud or

Low Smoke Zero-halogen LSZH shroud -

Suffix above part numbers with either -LSF or -LSZH



See page 44 for EarthingNut™ Information.