


# Swifts® SS light duty cable tray

lengths and fittings

12  
or  
18

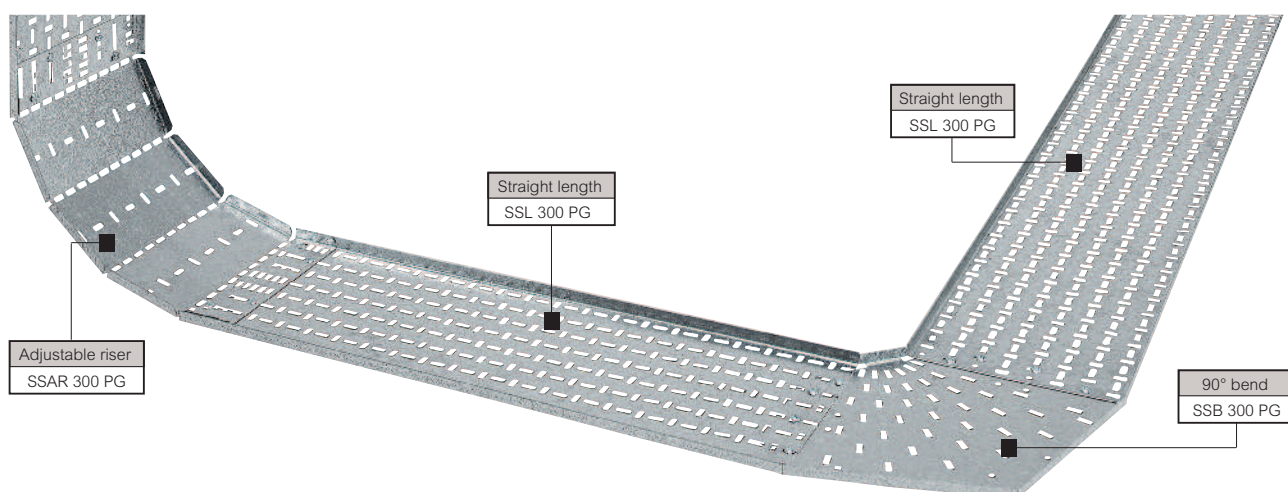


Selection charts **p. 12-13**  
Dimensions and technical information : lengths **p. 36** ; fittings **p. 38-45**  
Design notes **p. 118**  
Loading graphs **p. 36**

| Pack | Cat. Nos.        | Straight lengths – 3 m   |            |
|------|------------------|--|------------|
|      |                  | All SS straight lengths and fittings have integral couplers, no separate couplers are needed<br>For SS tray cut to length use fishplates across length-to-length joint, <b>p. 24</b> |            |
|      |                  | Width (mm)   | Depth (mm) |
| 1    | SSL 50 <b>F</b>  | 50   | 12         |
| 1    | SSL 75 <b>F</b>  | 75   | 12         |
| 1    | SSL 100 <b>F</b> | 100  | 12         |
| 1    | SSL 150 <b>F</b> | 150  | 12         |
| 1    | SSL 225 <b>F</b> | 225  | 12         |
| 1    | SSL 300 <b>F</b> | 300  | 18         |
|      |                  | For technical information, <b>p. 36-37</b>   |            |

| Pack | Cat. Nos.        | Fittings  |  |
|------|------------------|---|--|
|      |                  | All fittings have integral fishplates<br>No couplers required               |  |
| 1    | SSB <b>W F</b>   | <b>90° bends</b><br>For technical information, <b>p. 38-39</b>              |  |
| 1    | SSB <b>W A F</b> | <b>60°, 45° and 30° bends</b><br>For technical information, <b>p. 38-39</b> |  |

| Pack | Cat. Nos.         | Fittings (continued)  |  |
|------|-------------------|---|--|
|      |                   | <b>Risers</b><br>Inside and outside risers are not available in PG finish           |  |
| 1    | SSIR <b>W F</b>   | <b>90° inside riser</b><br>For technical information, <b>p. 40-41</b>               |  |
| 1    | SSIR <b>W A F</b> | <b>60°, 45° and 30° inside risers</b><br>For technical information, <b>p. 40-41</b> |  |

Additional gauges and finishes available to special order  
Contact us on +44 (0) 345 605 4333



Key : selecting SS light duty fittings. Replace the letters shown in **red** with your choice from the following options :  
**W** = Widths (mm) : 50, 75, 100, 150, 225, 300  
**A** = Angle (°) : 60, 45 and 30 (90 does not need to be included in order code)  
**F** = Finish : **G** (hot dip galvanised after manufacture)  
**PG** (pre-galvanised), **S** (stainless steel)