
Sensor-switched LED floodlight



EAN 4007841 065294 Article number 065294



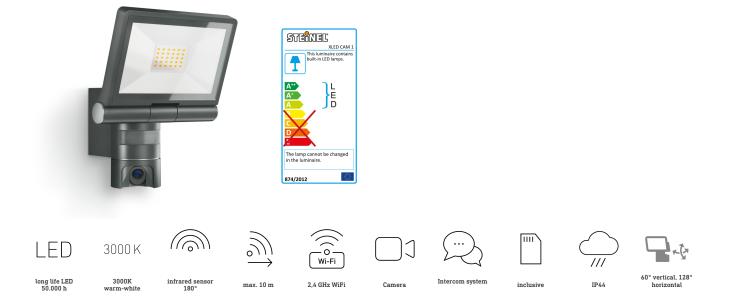

Function description

Security the smart way. Sensor-switched floodlight XLED CAM 1 (3000 K, 2200 lm, 21 W) with 180° infrared motion sensor and 10 m reach, swivelling HD wide-angle colour camera and intercom system. Delivers excellent surveillance images directly to the mobile device. Includes 16 GB SD card for storing the surveillance images. Free app for iOS and Android.

Technical specifications

Dimensions (L x W x H)	167 x 210 x 275 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	2,00 m
Sensor Technology	passive infrared
Output	21 W
Interconnection	No
Luminous flux	2200 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
With lamp	Yes, LED lamp
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	180 °
Angle of aperture	45 °
Sneak-by guard	No
Capability of masking out individual segments	No
Reach, radial	r = 2 m (6 m ²)
Reach, tangential	r = 10 m (157 m²)

Photo-cell controller	Yes
Twilight setting	10 – 10000 lx
Time setting	60 s – 15 Min.
Basic light level function	Yes
Basic light level function time	all night
Main light adjustable	30 - 100 %
Functions	lintercom system, Camera
Settings via	Wi-Fi
Soft light start	No
Continuous light	selectable
Impact resistance	IK03
IP-rating	IP44
Protection class	1
Ambient temperature	-10 - 40 °C
Housing material	Aluminium
Cover material	Glass transparent
Manufacturer's Warranty	3 years
Includes corner wall mount	No
PU1, net weight	1,471 kg
PU1, EAN	4007841065294


Sensor-switched LED floodlight



EAN 4007841 065294 Article number 065294




Detection Zone



Mögliche Montagehöhe: 1,80 m – 2,00 m Orange: radial Schwarz: tangential

Circuit diagram



Dimension Drawing

