

technical hotline +44 (0)1268 563720

ingress protected IP66 | wiring devices

Switchsocket Outlets, Timer Socket Outlets, and Key Operated Socket Outlets


Socket Outlets

13 AMP
IP66

RCD PROTECTED
13 AMP
IP66

13 AMP
IP66

16 AMP
IP66

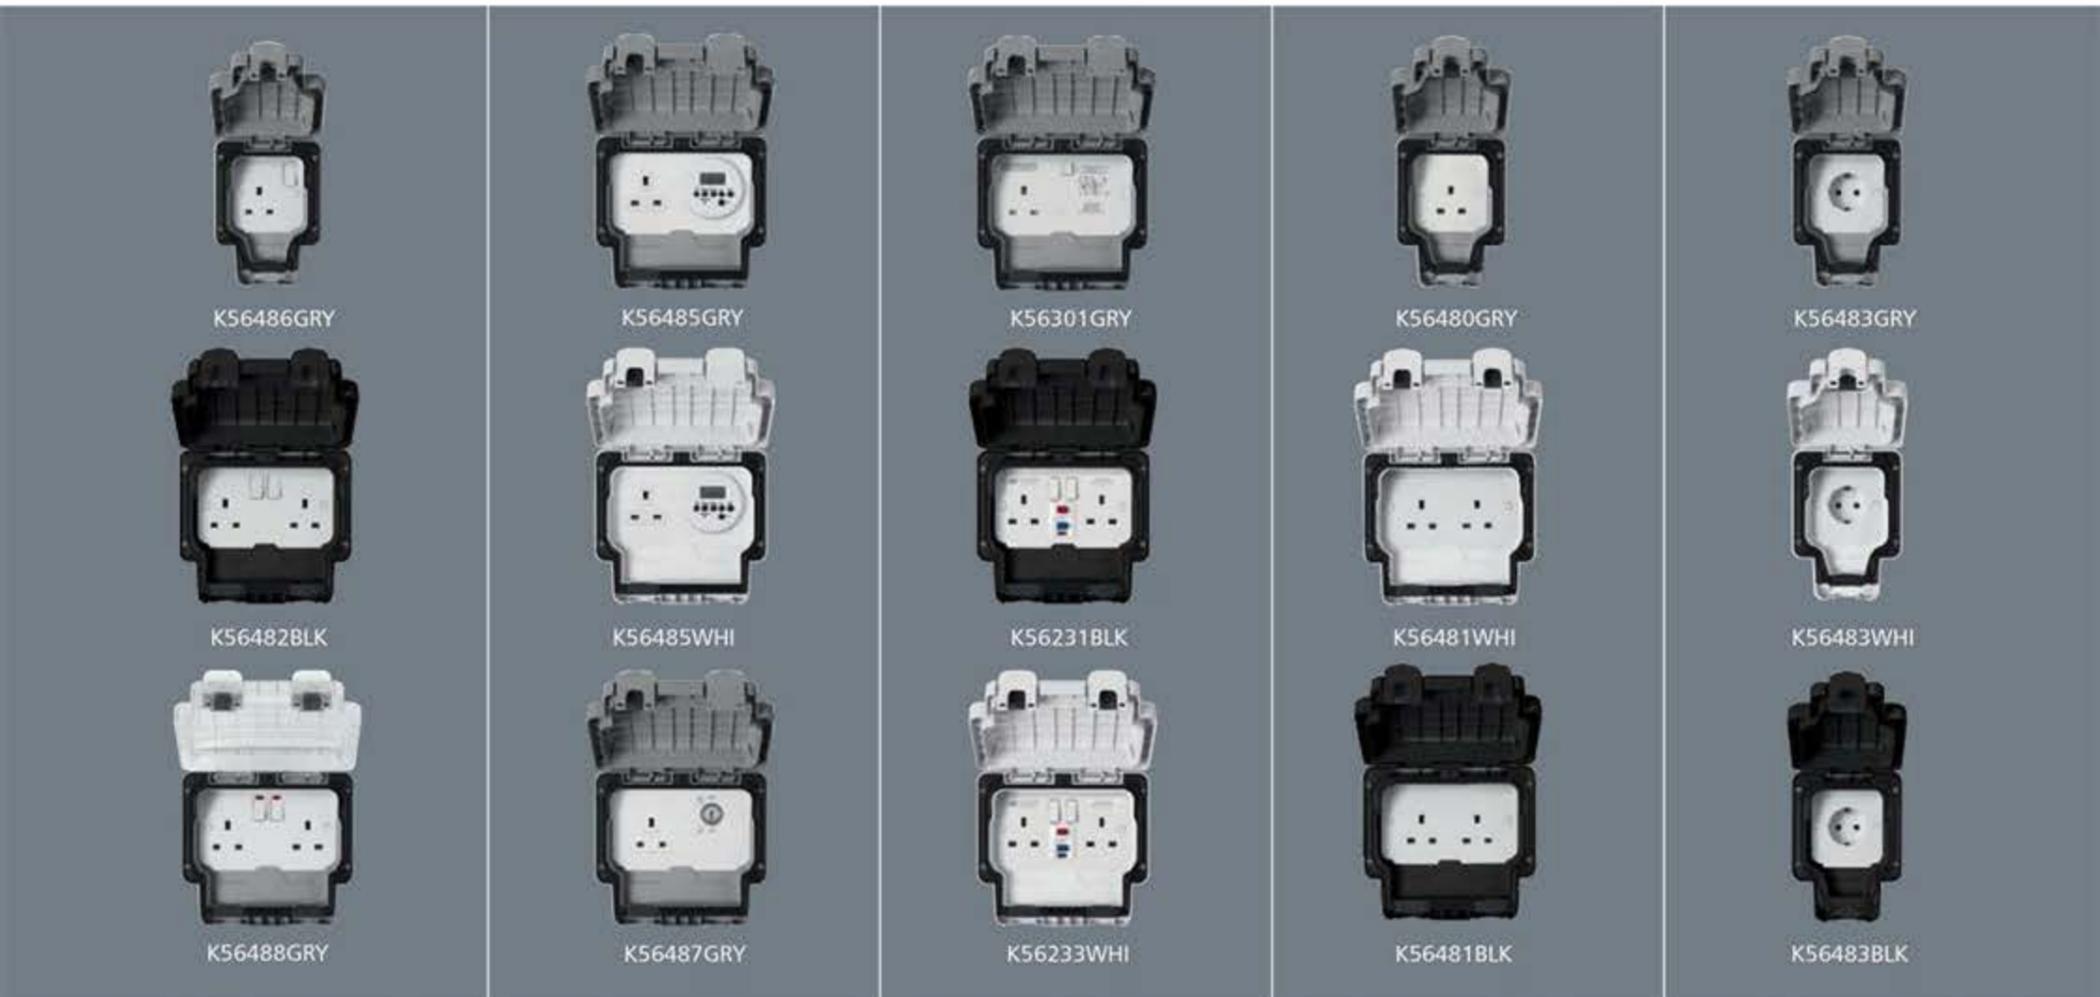

K56486GRY
K56486WHI
K56486BLK

13A DP
1 GANG
SWITCHED

K56482GRY
K56482WHI
K56482BLK

13A DP
2 GANG
SWITCHED

K56488GRY
K56488WHI
K56488BLK

13A DP SWITCHED
2 GANG
NEON
CLEAR COVER

Fixing holes are for No.8 woodscrews (not supplied).

K56486 has 4 x 20mm entries, 1 on top, bottom and each side and is supplied with an earth terminal in the back box.

2 gang backbox has 5 cable entries, 2 on top and 1 centrally on other 3 sides. Supplied with earth terminals in backbox.

DIMENSIONS:
1 gang: 157 x 110 x 89mm
2 gang: 157 x 175 x 89mm

BS 1363 Pt. 2: 1995

IP66 BS EN 60529: 1992

K56485GRY
K56485WHI
K56485BLK

13A SP
1 GANG
WITH ELECTRONIC TIMER MODULE

K56487GRY
K56487WHI
K56487BLK

13A 1 GANG DP
KEY OPERATED SOCKET

Timer Module meets the requirements of IEC 60730-1 and IEC 60730-2-7 Standards

K56301GRY
K56301WHI
K56301BLK

1 GANG DP
30 mA RATED TRIPPING CURRENT
ACTIVE CONTROL CIRCUIT

K56231GRY
K56231WHI
K56231BLK

2 GANG SP
30 mA RATED TRIPPING CURRENT
ACTIVE CONTROL CIRCUIT

K56233GRY
K56233WHI
K56233BLK

2 GANG SP
30 mA RATED TRIPPING CURRENT
PASSIVE CONTROL CIRCUIT

RCD protected sockets are pulsating d.c. and a.c. fault current sensitive.

Fixing holes are for No.8 woodscrews (not supplied).

Supplied with an earth terminal in the back box. The Sentriesocket has 5 entries. Suitable for supply voltage of 240V a.c. 50Hz

Standard Shutters.

DIMENSIONS: 157 x 175 x 89mm

BS 7288: 1990

IP66 BS EN 60529: 1992

K56480GRY
K56480WHI
K56480BLK

13A 1 GANG
UNSWITCHED

K56481GRY
K56481WHI
K56481BLK

13A 2 GANG
UNSWITCHED

Fixing holes are for No.8 woodscrews (not supplied).

K56480 has 4 x 20mm entries, 1 on top, bottom and each side and is supplied with an earth terminal in the back box.

BS 1363: Pt2: 1995

IP66 BS EN 60529: 1992

K56481 Backbox has 5 cable entries, 2 on top and 1 centrally on other 3 sides. Supplied with earth terminals in backbox.

DIMENSIONS:
1 gang: 157 x 110 x 89mm
2 gang: 157 x 175 x 89mm

BS 1363 Pt.2: 1995

IP66 BS EN 60529: 1992

K56483GRY
K56483WHI
K56483BLK

16A
1 GANG
2P+E
UNSWITCHED

(NON UK)

Fixing holes are for No.8 woodscrews (not supplied).

K56483 is for use with plugs having right angled cable exit.

DIMENSIONS:
157 x 110 x 89mm

IEC60884-1: 2006

IP66 BS EN 60529: 1992

Masterseal enclosures are manufactured from polycarbonate. This provides an extremely high level of impact resistance. However some chemicals and synthetic oils can harm polycarbonate.

Refer to Technical Hotline for assistance
+44 (0) 1268 563720