




Powerstream

Unvented instantaneous water heaters

- Delivers instant hot water at the point of use
- Compact and unique design eliminates the need for centrally stored hot water cylinders
- Half power selection available on installation
- Thermal cut-out protection

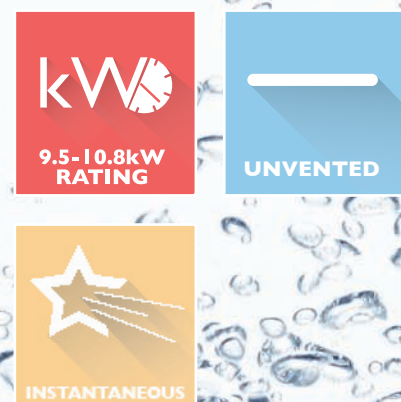


Key Features

- Water supplied to one or two outlets (one shower and one hand basin or two hand basins)
- Water outlet via spray tap accessories
- Direct mains supply
- Small, compact shape
- Remote fitting option
- No standing heat losses
- Corrosion resistant steel backplate

Technical Specification

- kW loading at 240V: 9.5, 10.8 or 12kW
- Flow/service valve
- Water flow operated power switch
- Impact resistant thermoplastic cover
- Sheathed heating elements
- Operating pressure 1 bar to 10 bar
- NB: We recommend the use of the Redring 1/4 Turn Spray Tap

Dimensions

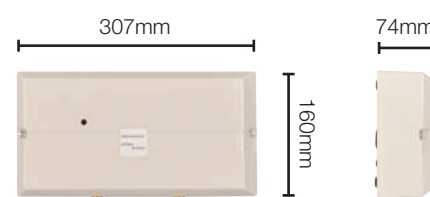

Product Range

Product Ref.	Finish	Model	Cat No.
Powerstream 9.5kW	White	RP1	45793201
Powerstream 10.8kW	White	RP10.8	45793204
Powerstream 12kW	White	RP12	45793202
Shower Mixer Kit	Chrome	RM1	85793620
1/4 Turn Lever Control Spray Taps (Pair)	Chrome	LT1	85793616



Instant Manual I3V

- Easy to use –
- single control for temperature and flow rate
- Unique Vortex technology improves flow and prevents lime scale
- Instant heating – saving energy and water
- Robust and compact construction



Instant Auto AV3

- Infra-red, touch-free operation –
- ideal for high care areas
- Unique Vortex technology improves flow and prevents lime scale
- Instant heating –
- saving energy and water
- Robust and compact construction

Key Features (Instant Manual I3V)

- Simple to fit – direct swap with previous Redring I3V installations
- Heat on neon indicator and overheat protection
- 3KW power = hot water, fast
- Anti-vandal spray head and swivel 200mm stainless steel spray arm
- 1 year guarantee

Key Features (Auto AV3)

- Simple to fit – direct swap with previous Redring AV3 installations
- Timed shut off after 40 seconds save water and power
- Heat on neon indicator and overheat protection
- Installer adjusted water temperature
- Anti-vandal spray head and swivel 200mm stainless steel spray arm
- 1 year guarantee

Technical Specification (Instant Manual I3V)

- 3KW power
- Direct connection to water mains – standard 15mm pipework
- Top, bottom and rear cable entry options
- Standard fixing kit supplied
- Operating water pressure 0.7 – 7 bar (10-100 PSI)
- Water pressure operated power switch
- IPX4 rated

Technical Specification (Auto AV3)

- 3KW power
- Direct connection to water mains – standard 15mm pipework
- Top, bottom and rear cable entry options
- Standard fixing kit supplied
- Operating water pressure 0.7 – 7 bar (10-100 PSI)
- Water pressure operated power switch
- IPX4 rated

Product Ref.	Finish	Model	Cat No.
Manual I3V	White	I3V	43678901
Auto AV3	White	AV3	43679901

Vortex Technology, Improves flow. Reduces limescale.

