



# **Hamilton**® CHERITON VICTORIAN 1 GANG 2 WAY 10AX ROCKER SWITCH



## 2 Way and Intermediate Switching Wiring Methods

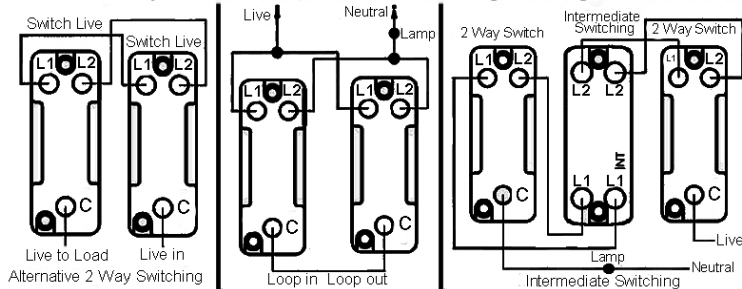

Order Code :  
92 R21 PB-B

Cheriton Victorian Polished Brass 1 gang 2 Way 10AX Rocker. Standard Insert will be Polished Brass with a Black surround.

### Attributes

|                               |   |
|-------------------------------|---|
| Primary Range                 | Cheriton Victorian  |
| Instt                         | R21   |
| Plate material                | Metal   |
| Size (single) height          | 88mm  |
| Size (single) width           | 88mm  |
| Size (single) depth           | 8.5mm   |
| Box fixing hole centres       | 60.3mm  |
| Grid fixing hole centres      | Grid fixing inserts are available on Cheriton Victorian plates. For full details refer to GRID-IT technical pages and GRID-IT catalogue |
| Minimum wall box depth        | 25mm  |
| Current rating                | 10AX  |
| Voltage                       | 220/250V AC   |
| Max load                      | 10 Amp inductive  |
| IP rating                     | IP2XD   |
| Switched Poles                | Single  |
| Contact Gap Minimum           | 3mm   |
| Terminal Capacity 1           | 5 x 1mm <sup>2</sup>  |
| Terminal Capacity 2           | 4 x 1.5mm <sup>2</sup>  |
| Terminal Capacity 3           | 1 x 2.5mm <sup>2</sup>  |
| Terminal Capacity 4           | 1 x 4mm <sup>2</sup> Multi-Strand   |
| Terminal Capacity 5           | 1 x 6mm <sup>2</sup>  |
| Earth Terminal Capacity 1     | 5 x 1mm <sup>2</sup>  |
| Earth Terminal Capacity 2     | 4 x 1.5mm <sup>2</sup>  |
| Earth Terminal Capacity 3     | 3 x 2.5mm <sup>2</sup>  |
| Earth Terminal Capacity 4     | 1 x 4mm <sup>2</sup> Multi-Strand   |
| Earth Terminal Capacity 5     | 1 x 6mm <sup>2</sup>  |
| Product Class 1               | Must be earthed   |
| Ambient Operating Temperature | -5Å° to +40Å°C  |
| Recommended Location          | Indoor use only   |
| Max installation Altitude     | 2000m   |
| BS EN ISO Standard            | BS EN 60669-1   |
| Patents And Trademarks        | Trade Mark No. 2344779  |

All products listed conform to current British or European standards and the product information is correct at the time of going to press.

All accessories are manufactured under an accredited BS EN ISO 9001 : 2008 Quality System.

It is the policy of the company to continually improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.

Illustrations and diagrams are reproduced within the limitations of reproductions and printing processes are not binding.

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.



ISO 9001:2008  
CERT NO.  
FM11238

R. Hamilton & Co Ltd.

Unit G

Quarry Industrial Estate

MERE, Wiltshire

UK BA12 6LA

Tel: +44 (0)1747 860088

Fax: +44 (0)1747 861032

Email: [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com)

Web: [www.hamilton-litestat.com](http://www.hamilton-litestat.com)