
Can also be

used with TRADITIONAL **LED lamps** See Page 55-57 **BATHROOM LIGHTING**

See page 14-15 for LED Bathroom Section

Our IP rated Bathroom Lighting meets the standard for safe installation and use in bathroom zones

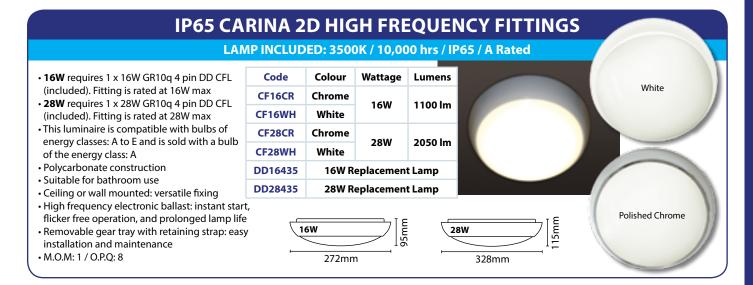

IP44 CHROME AUREOLA GLASS WALL/CEILING FITTINGS CFA100 - 100W Max / IP44 • CFA28 - DD LAMP INCLUDED / 28W / 3500K / 2050 lm / 8,000 hrs / IP44 / A Rated • Pressed steel base • Glass diffuser • Highly polished chrome effect trim • Primarily designed for bathrooms • M.O.M: 1 / O.P.Q: 5 320mm **CFA100 (ES)** • Requires 1 x suitable ES energy saving lamp (not included). Fitting is rated at 100W max • This luminaire is compatible with bulbs of the energy classes: A++ to E CFA28 (2D)

- Requires 1 x 28W GR10q 4 pin DD CFL (included). Fitting is rated at 28W max
- This luminaire is compatible with bulbs of the energy classes: A to E and is sold with a bulb of the energy class: A
- · High frequency electronic ballast: instant start, flicker free operation, and prolonged lamp life

Code	Version	
CFA100	ES (E27) 100W Max	
CFA28	28W 2D (Lamp Included)	
DD28435	CFA28 Replacement Lamp	

IP44 35W MAX POLISHED CHROME GU10 SPOTLIGHTS • Requires 1 or 3 x GU10 energy saving lamps (not included). Fittings are rated at 35W max (per lampholder) 85mm • This luminaire is compatible with bulbs of the energy classes: A++ to E BSL1PCR • Fully enclosed lampholder(s): provides IP44 protection to allow installation in bathroom zone 2 • Iron construction with aluminium alloy head(s) • Fully adjustable head(s): for fully adjustable directional light source • Contemporary design: for stylish interior spotlight solution • **BSL1PCR** = M.O.M: 1 / O.P.Q: 36 150mm 85mm • **BSL3PCR** = M.O.M: 1 / O.P.Q: 6 BSL3PCR Code Version **BSL1PCR** Single BSL3PCR 55mm 85mm

Triple Plate