Lumens

378 lm

Wattage

CABINET FITTINGS

6W

TRADITIONAL CABINET LIGHTING

See page 16-17 for LED Cabinet Section

Designed primarily for Cabinet Lighting our versatile range suits many discreet applications

LINEAR T4 LINKABLE TRIPHOSPHOR UNDER CABINET FITTINGS

ALL FITTINGS & LAMPS (INCLUDED): 3400K / 10,000 hrs / IP20 / A Rated



2m mains

link lead

- TUS6NL requires 1 x 6W G5 T4 220mm fluorescent tube (included). Fitting is rated at 6W max
- TUS10NL requires 1 x 10W G5 T4 341mm fluorescent tube (included). Fitting is rated at 10W max
- TUS16NL requires 1 x 16W G5 T4 468mm fluorescent tube (included). Fitting is rated at 16W max
- TUS20NL requires 1 x 20W G5 T4 567mm fluorescent tube (included). Fitting is rated at 20W max
- This luminaire is compatible with bulbs of the energy classes: A to E and is sold with a bulb of the energy class: A
- Polycarbonate construction Individual rocker switch
- Link & light system compatible
- Incorporates plug and socket with through wiring: can be linked with up to 5 other fittings
- 2 metres link mains lead included
- M.O.M: 5 / O.P.Q: 50

REPLACEMENT LAMPS (N64 RANGE):

- Specifically designed for use with Eterna® brand fittings
- •6W / 10W / 16W Lamps = M.O.M: 10 / O.P.Q: 200
- 20W Lamps = M.O.M: 10 / O.P.Q: 100

LINK LEADS (NL RANGE):


- Plug compatible with link & light range
- PVC construction
- M.O.M: 5 / O.P.Q: 200



N64/1: 220mm N64/3: 341mm N64/5: 468mm N64/7: 567mm



N64/3: 353mm N64/5: 480mm N64/7: 580mm

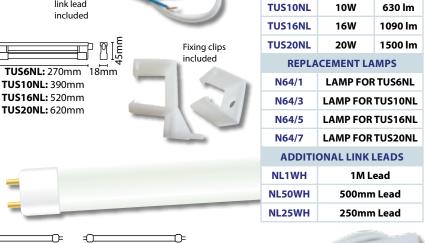



Code

TUS6NL

POLISHED CHROME LV SURFACE/RECESSED CAPSULE DOWNLIGHT

LAMP INCLUDED: 20W / 2700K / 300 lm / 2,000 hrs / IP20 / B Rated

- Requires 1 x suitable 20W 12V G4 M47 halogen capsule (included). Fitting is rated at 20W max
- This luminaire is compatible with bulbs of the energy classes: B to E and is sold with a bulb of the energy class: B
- Pressed steel construction
- Frosted glass diffuser: soft lighting effect
- Pre-wired with mini connector and 2.4 metres of silicone cable: easy installation with plug in system, or can be direct wired by removing mini connector
- · Can be surface or recessed mounted
- Recessed hole cut out size: 61mm
- M.O.M: 3 / O.P.O: 60

Mini plua included

