
Hamilton

www.hamilton-litestat.com

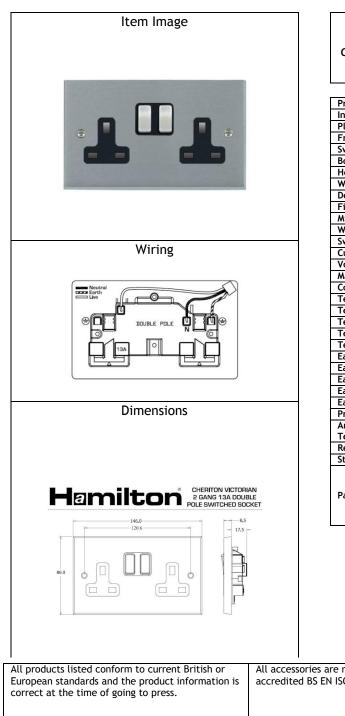

96 SS2 SC-B

Cheriton Victorian Satin Chrome 2 gang 13A Switched Socket - Double Pole. Standard Insert will be Satin Chrome with a Black surround.

| Primary Range | Cheriton Victorian | |
|---------------------------|--|--|
| Insert Type | Switched Sockets | |
| Plate Finish | Satin Chrome | |
| Frame Finish | | |
| Switch Colour | Satin Chrome | |
| Body & Switch Trim | Black | |
| Height | Double = 86mm | |
| Width | Double = 146mm | |
| Depth | Double = 8.5mm | |
| Fixing Hole Centres | Box Fixing = 120.6mmBox Fixing = 120.6mm | |
| Minimum Wall Box Depth | 35mm | |
| Wattage | | |
| Switched Poles | Double | |
| Current Rating | 13 Amp | |
| Voltage | 220/250V AC | |
| Max load | 13 Amp | |
| Contact Gap Minimum | 3mm | |
| Terminal Capacity 1 | 4 x 2.5mm2 | |
| Terminal Capacity 2 | 3 x 4mm2 | |
| Terminal Capacity 3 | 2 x 6mm2 Multi-Strand | |
| Terminal Capacity 4 | 1 x 10mm2 | |
| Terminal Capacity 5 | | |
| Earth Terminal Capacity 1 | 4 x 2.5mm2 | |
| Earth Terminal Capacity 2 | 3 x 4mm2 | |
| Earth Terminal Capacity 3 | 2 x 6mm2 Multi-Strand | |
| Earth Terminal Capacity 4 | 1 x 1mm2 | |
| Earth Terminal Capacity 5 | | |
| Product Class 1 | Must be earthed | |
| Ambient Operating | -5° to +40°C | |
| Temperature | | |
| Recommended Location | Indoor use only | |
| Standard/Approval | BS 1363 | |
| Patents and Trademarks | Trade Mark No. 2344779 | |

| l. | | I | |
|----------|---|--|--|
| All proc | ducts listed conform to current British or | All accessories are manufactured under an | It is the policy of the company to continually |
| Europe | an standards and the product information is | accredited BS EN ISO 9001 : 2008 Quality System. | improve products as part of our development |
| correct | at the time of going to press. | | programme. |
| | | | Therefore, we reserve the right to alter designs |
| | | | and dimensions without prior notice. |
| Illustra | tions and diagrams are reproduced within | Due to manufacturing processes we cannot | |
| the lim | itations of reproductions and printing | guarantee an exact colour match and shadings of | Correct as at August 2012 |
| process | ses are not binding. | certain finishes. | E&OE |

R Hamilton & Co Ltd • Quarry Industrial Estate • Mere • Wiltshire • BA12 6LA • UK T: +44 (0)1747 860088 • F: +44 (0)1747 861032 • E: info@hamilton-litestat.com www.hamilton-litestat.com

Directors: R Hamilton • I Hamilton • RL Haines • CP Savory • AMH Hamilton (Secretary) Registered Office: Cedar House • Breckland • Linford Wood • Milton Keynes • MK14 6EX • Buckinghamshire Registered in London No. 941624 • VAT Registration No. 222 6607 84

