

Hang About!

Essential Wire Suspension Systems & Accessories

• Catenary Wire & Accessories **Stainless Steel**

Code	Type
ICWSS30	30 Metre Stainless Steel Wire
ICWSS50	50 Metre Stainless Steel Wire
ICWSS100	100 Metre Stainless Steel Wire
ICWSSE	Eyelet For Catenary Wire
ICWSSG	Wire Rope Grip
ICWSSH	Hook Plate For Catenary Wire
ICWSSR	Ring Plate For Catenary Wire
ICWSSS	4" Strainer (Tensioner)

Our range of Catenary Wire & Accessories, excluding the Carabiner Hook (ICWC), now in Stainless Steel.

Material: Stainless Steel A2 (304)



• Catenary Wire & Accessories **Galv Steel**

Code	Type
ICW30	30 Metre Galvanised Steel Wire
ICW50	50 Metre Galvanised Steel Wire
ICW100	100 Metre Galvanised Steel Wire
ICWC	Carabiner Hook
ICWE	Eyelet For Catenary Wire
ICWG	Wire Rope Grip
ICWH	Hook Plate For Catenary Wire
ICWR	Ring Plate For Catenary Wire
ICWS	4" Strainer (Tensioner)

Our range of Catenary Wire & Accessories

Material: Galvanised Steel



• Jack Chain **Pre-Galv BZP**

Code	Size
JACK	10m

Standard: Single Link DIN9021 Large Diameter

Steel: No 10. (3mm Thick)

Max Work Load: 7.5Kg

Finish: Pre Galv

Packed: 10m Boxes



• Eye Bolts **BZP**

Code	Size
ISEB6	M6 x 80
ISEB8	M8 x 80
ISEB10	M10 x 80

Steel: Grade 4.6 (Mild)

Finish: Zinc & Clear



• Catenary Wire kits **Stainless Steel**

Code	Type
ICWSSKIT	Stainless Steel Catenary Wire Kits

Stainless Steel Catenary Wire Kits

Material: Stainless Steel A2 (304)

IN STOCK NOW



• Wedge Drop-In Anchor **ZY**


Code	Size	Length (b)
IASM6	M6	25mm
IASM8	M8	30mm
IASM10	M10	40mm
IASM12	M12	50mm

Material: Steel

Usage: Medium duty internal thread

Application: Ideal for suspension of cable tray, ductwork

Substrate Applicable: Concrete-Limited suitability in stone and solid brickwork



• Lipped Drop-In Anchor **BZP**


Code	Size	Length (b)
LDA6	M6	25mm
LDA8	M8	30mm
LDA10	M10	40mm

Material: Steel

Usage: Medium duty internal thread, fit flush to wall

Application: Ideal for suspension of cable tray, ductwork

Substrate Applicable: Concrete-Limited suitability in stone and solid brickwork.



• Polyester Anchor Resin **300ml**

Code	Size
SRES	300ml

Usage: Concrete, Stone, Perforated Bricks and Cavity Blocks in a wide range of applications.

For instructions of use and other technical data, please ask for our Specification Sheet.



• Wire Hanger **ZY**

Code	Size	Length (b)
IWH660	M6 x 60	60mm

Material: Steel

Usage: Medium duty installation, expansion type

Application: Suspended ceilings, catenary/suspension wire

Substrate Applicable: Concrete, Stone and solid brickwork.



• Light Hanger (Witches Hat) **BZP**

Code	Erico Caddy	B-Line	Britclips	Box Quantity
MP1	DFF1	BH17	HSC1	50



• Ceiling Clip **BZP**

Code	Stud Size	Erico Caddy	B-Line	Britclips	Box Qty
T2516	M6 x 16	4G16M16	BMA41616	AC25	50



Cable Blocker/Gripper

Function:


Recommended for the suspension of HVAC, electrical and mechanical services (For indoor & stationary setting).

Applications:

Suitable for locking wire rope to insure desired safe working loads.

Technical Data:

- SMANCA compliance - all products carry a 5:1 Safety Factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

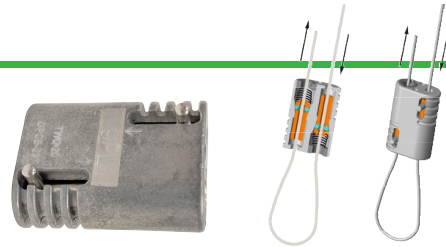

Code	Description
ICWLG3	2.4mm - 3.2mm

Looped Anchor with Gripper

Wire Rope crimped masonry anchor.

Function:

Recommended for suspension of HVAC, Electrical and Mechanical services (For indoor setting)

Applications:

Concrete ceilings and cracked concrete ceilings

Technical Data:

- SMACNA compliance- all products carry a 5:1 safety factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.


Material Specification

MS-En1A with White Zinc

Max Load 280kg

SWL 56Kg

Safety Factor 5:1

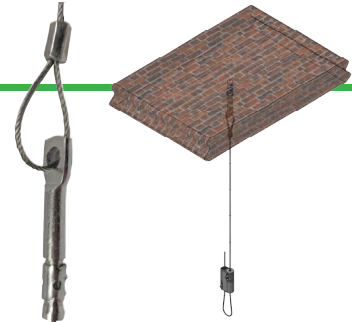

ICWSA3

ICWSA5

Code	Description
ICWSA3	7 x 7 Strand 2mm (3 metres)
ICWSA5	7 x 7 Strand 2mm (5 metres)

Snaphook with Gripper

Wire Rope crimped with snaphook.

Function:

Recommended for the suspension of HVAC, electrical and mechanical services.

Applications:

Suitable for use on cable trays etc.

Technical Data:

- SMACNA compliance- all products carry a 5:1 safety factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

Material Specification


Hook MS-En8D White Zinc

Wire rope MS Galvanized IS228, (ASTM-D117) -2016, IS-6745-2011 Hexagonal

Max Load 280kg

SWL 56Kg

Safety Factor 5:1



ICWSH3

ICWSH5

Code	Description
ICWSH3	7 x 7 Strand 2mm (3 metres)
ICWSH5	7 x 7 Strand 2mm (5 metres)

Toggle with Gripper

Wire Rope crimped with end stopper & toggle

Function:

Recommended for the suspension of HVAC, electrical and mechanical services.

Applications:

Suitable for profile roof cladding, light fittings, luminaries and other cavities.

Technical Data:

- SMACNA compliance- all products carry a 5:1 safety factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

Material Specification

Toggle


End Stopper

Wire rope MS White Zinc
Ms Zn Trivalent
Ms Zn Trivalent IS228, (ASTM-D117) -2016 IS-6745-2011

Max Load 280kg

SWL 56Kg

Safety Factor 5:1

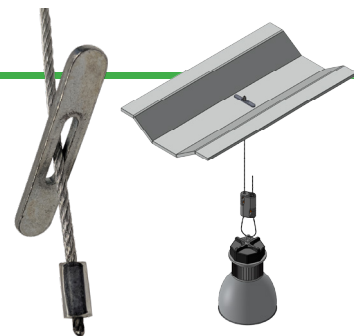

ICWST3

ICWST5

Code	Description
ICWST3	7 x 7 Strand 2mm (3 metres)
ICWST5	7 x 7 Strand 2mm (5 metres)

Stud with Gripper

Wire Rope crimped with M8 stud Comes complete with drop-in anchor.

Function:

Recommended for the suspension of HVAC, electrical and mechanical services. (For indoor & stationary setting).

Applications:

Concrete ceilings, metal decking and pressed metal brackets (with nuts).

Technical Data:

- SMACNA compliance- all products carry a 5:1 safety factor
- Tested & Certified by TUV Nord.
- As per UL 1598, CSA C22.2 No.250.0-08

Material Specification

Stud

MS-En1A White Zinc
MS Galvanized IS228, (ASTM-D117)
-2016, IS-6745-2011

Wire Rope

280kg

Max Load

SWL

56Kg


Safety Factor

5:1

Also compatible
with Wedge Nuts
and Channel Nuts

ICWSS3

ICWSS5

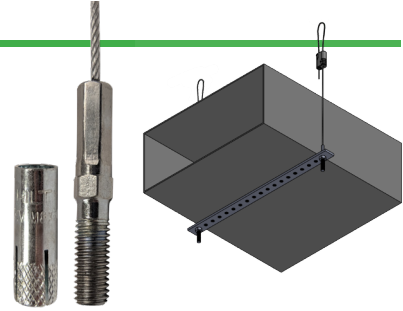

Code	Description
ICWSS3	7 x 7 Strand 2mm (3 metres)
ICWSS5	7 x 7 Strand 2mm (5 metres)

Loop Wire with Gripper

Wire Rope crimped with pre-formed loop.

Function:

Recommended for the suspension of HVAC, electrical and mechanical services.

Applications:

Purlins, beams, roof trusses and other accessible building features.

Technical Data:

- SMACNA compliance- all products carry a 5:1 safety factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

Material Specification

Ferrule

MS-En8D White Zinc
(Hexagonal Crimped)

Wire rope

MS Galvanized IS228, (ASTM-D117)-
2016, IS-6745-2011

Max Load

280kg

SWL


56Kg

Safety Factor

5:1

ICWSL3

ICWSL5



Code	Description
ICWSL3	7 x 7 Strand 2mm (3 metres)
ICWSL5	7 x 7 Strand 2mm (5 metres)

Snap Hook 'Y' with Gripper

Wire Rope crimped Snap Hooks.

Function:

Recommended for the suspension of HVAC, electrical and mechanical services.

Applications:

Suitable for use on cable trays etc.

Technical Data:

- SMANCA compliance - all products carry a 5:1 Safety Factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

Material Specification:

Hook

MS-En8D White Zinc

Wire Rope

MS Galvanized IS228, (ASTM-D117)
-2016, IS-6745-2011

Crimping

Hexagonal

Max Load

280kg

SWL


56Kg

Safety Factor

5:1

ICWSY3

ICWSY5

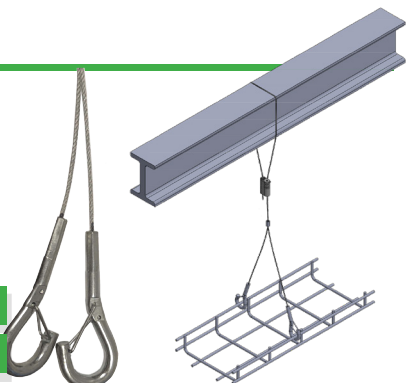

Code	Description
ICWSY3	7 x 7 Strand 2mm (3 metres)
ICWSY5	7 x 7 Strand 2mm (5 metres)

HangTyte™

Wire Suspension System