



Simple connectivity and control

With the emphasis now on flexibility and ease of installation many building design projects are now focusing on products and services that can adapt to changing legislation, energy efficiency and the ever changing needs of the client.

The Lighting Management System is a new range of additional products to the existing Flow™ range and has been designed specifically to help contractors create more complex lighting installations quickly, easily and safely. It features a number of new products that allow the quick connection, configuration and re-configuration of circuits, primarily intended for lighting.

Flexibility is important as requirements can change and the ability to adapt to these changes quickly and economically is seen as an advantage. The development of this range has evolved as a result of the increasing demand from our customers.

Flow™ is perfect for all
types of installations...



inceptor

Inceptor® Compatible

The Flow™ range works perfectly with the Inceptor® lighting range, making wiring a lighting circuit easy! All products within the Inceptor® lighting range* come pre-wired with both male and female Flow™ connectors, creating a range of lighting which is quick and easy to install as well as to remove and replace for the purpose of circuit testing.

*excluding the Pico and Pico FG.

BIM

Building Information Modelling

BIM is changing how buildings, infrastructure, and utilities are planned, designed and built. At Scolmore® we are committed to support you on and off the job by providing you direct access to our BIM library, which is available on our website, scolmore.com.



Dimmable




Complete Control

The Click® Smart system makes it easy to adapt and upgrade your installation, offering a smart solution that has at its core, accessibility and simplicity for the end user. Flow™ products can incorporate wireless switching and dimming scenarios using Click® Smart products.

8 Gang Distribution Hub

The 8 Gang Flow™ Distribution Hub has been designed to help contractors create more complex lighting installations quickly, easily and safely.

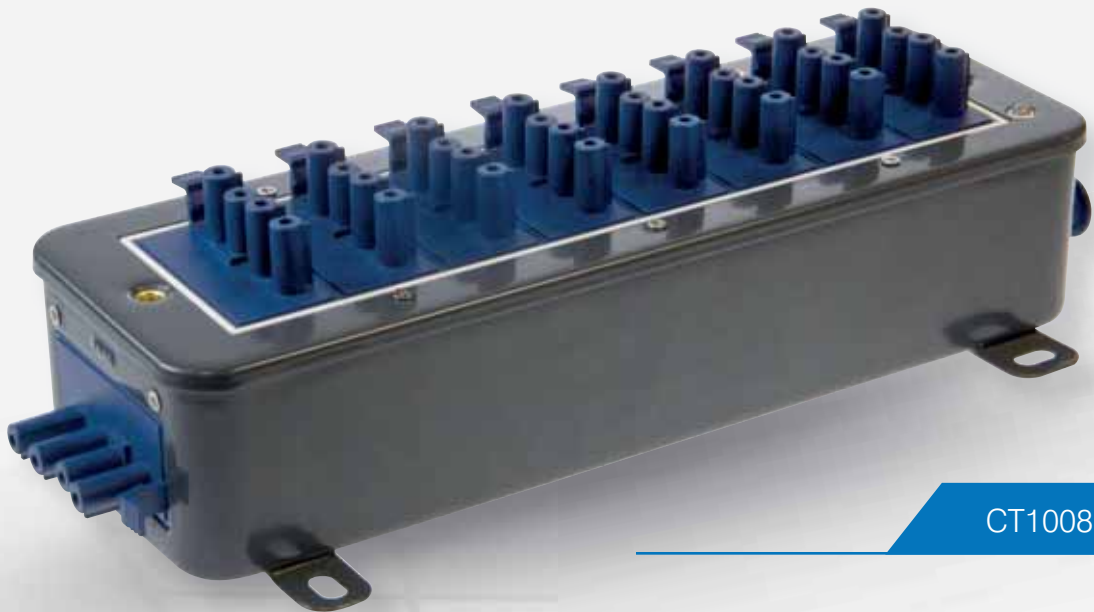

CT1008

1 x 8 Way Configuration

Utilises male and female Flow™ connector options and wired in conjunction with splitters and adaptors.

Ample Fixing Points

Suitable for any method of installation.

Suitable for Loads up to 20A

Can be used for more than just lighting.

Durable Heavy Duty Finish

Can withstand all installation requirements.

Controlled and Dimmed

Management boxes can be controlled or dimmed using suitable PIR sensors or mains dimmers.

Additional 8 Ways

Using the CT350 splitter.

Standards: BS 8488, BS 5733

Dimmable



IP20

10 YEAR
WARRANTY



Additional output allows interlinking
or provides additional way.

Dimensions

Dimensions: 264mm x 114mm x 70mm

