

T80Z Fast-Fit

electric shower

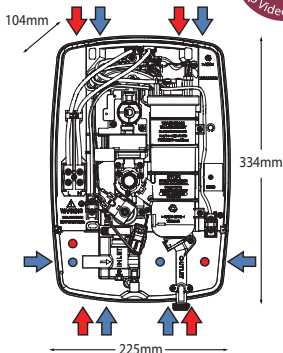


Diagram Key:



For further details about Swing-Fit™ please see page 41.

*At running pressure/flow 0.7 Bar at 8 l/min (1.2 Bar at 11 l/min for 10.5kW) the shower will continue to operate at a reduced performance.

Dimensions given are approximate



Operating Features

- Swing-fit™ – Terminal for left & right cabling
- Swivel-fit™ – A 180° fully reversible water inlet providing flexibility for new or replacement installations
- Ideal size and shape for replacement installations
- Top entry trims removable without tools
- Push button Start/Stop
- Separate temperature and power controls
- Low pressure indicator
- Power on indicator
- Stylish riser rail kit with adjustable fixing brackets
- Rub clean showerhead – 3 spray pattern

Finish	Power	Code
Chrome	8.5 kW	SP8CHR8ZFF
Chrome	9.5 kW	SP8CHR9ZFF
Chrome	10.5 kW	SP8CHR1ZFF
White/Chrome	7.5 kW	SP8007ZFF
White/Chrome	8.5 kW	SP8008ZFF
White/Chrome	9.5 kW	SP8009ZFF
White/Chrome	10.5 kW	SP8001ZFF
White/Chrome	8.5 kW	ECO8008ZFF

Temperature Control	Stabilised
Power Ratings	7.5 kW, 8.5 kW, 9.5 kW, 10.5 kW
Inlet Connection	15mm compression
Water Entry Points	Top, bottom, side bottom, back (left hand side unit) Top, bottom, side bottom, back (right hand side unit)
Cable Entry Points	Top, bottom, back (left hand side unit) Top, bottom, back (right hand side unit)
Outlet Connection	1/2" BSP
Plumbing System	Cold water only
Minimum Running Pressure/Flow for full performance	1 Bar @ 8 l/min and 1.5 Bar @ 11 l/min for 10.5kW*
Maximum Static Pressure	10 Bar
Surface Mounted Only	
Approvals, Complies with	BEAB, CE, BSI Kitemark
Guarantee	2 years