

Avignon

Electric Radiator

0.6, 0.9, 1.5 and 1.8 kW



p.94


Usage

A stylish, modern fixed heating solution that is ideal for application in both home and office environments. This range features a slimline design and uses advanced technology to provide optimum heat and efficiency across a variety of applications.

Features and Benefits

- Slimline, modern, curved design
- Available in 0.6, 0.9, 1.5 and 1.8 kW
- Smart heating for a variety of applications
- High precision digital thermostat accurate to the nearest degree
- 24/7 LCD timer
- 2 user set temperature settings: peak for whilst the room is occupied and off peak (typically night or frost protection)
- Adjustable temperature range 10 - 35°C
- Open window function with sensor technology to detect temperature change
- Ceramic heating element and dry thermal technology
- Radiant and convection heat for comfort and efficiency
- Choose from pre-set schedules or create your own to meet specific lifestyle requirements
- Thermal safety protection
- Frost protection function set at 7°C
- Wall mounted - secure bracket included
- Integrated child lock

Product Code	Power (kW)	Timer	Current (amps)	Number of Fins
AVG600T	0.6	Yes	2.6	4
AVG900T	0.9	Yes	4.4	5
AVG1500T	1.5	Yes	6.5	9
AVG1800T	1.8	Yes	8.7	10

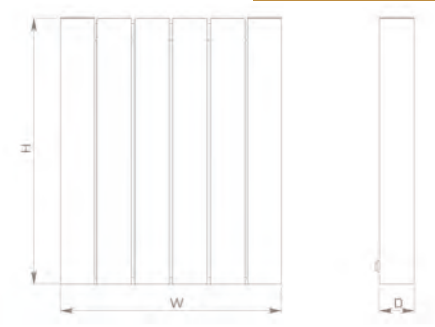

Outer Casing

Die cast aluminium

Fins

Die cast aluminium

Controls

Digital LCD display, controls and screen.

Safety

Overheat temperature protection.

IP Rating

IP20

Installation

Wall mounting kit included and must be used.

Electrical Connection

Installation must comply with current IEE regulations.

The product should be connected to the fixed wiring of the property via a double pole fused spur with a minimum break capacity of 13 amps.

Cable pre-wired (1.4m), white cable, entry to the bottom right of the unit.

Class I

Approvals

CE

Standard Warranty

1 year parts or replacement warranty.

Product Code	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
AVG600T	575	480	80	8.5
AVG900T	575	560	80	10
AVG1500T	575	800	80	15.5
AVG1800T	575	960	80	19