


ACCESSORIES

2
YEARS
GUARANTEE
ON PRODUCT

THERMOSTATIC VALVE

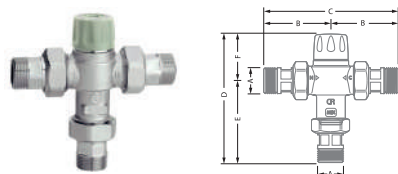

This accessory is installed at the hot water outlet of the heater and allows mixing with cold water from the supply network. The resulting mixed water is transported at a lower temperature, achieving energy-savings and minimising heat losses through the pipeline.

TECHNICAL INFORMATION	
Body: dezincification-resistant alloy	EN 12165 CW602
Shutter	PSU
Springs	Stainless steel
INSTALLATION	
Hot & cold water inlet filters	✓
Hot & cold water inlet check valves	✓
SECURITY	
Regulation lock with nut protection	✓
Anti-scald protection	✓
REGULATIONS & GUARANTEES	
Standard NF 079	✓
Guarantee on product	2 years

MODELS	RTVAL001
DIMENSIONS	
A (inches)	1/2"
B (mm)	62.5
C (mm)	125
D (mm)	126.5
E (mm)	81.5
F (mm)	45
MECHANICAL CHARACTERISTICS	
Temperature adjustment range	30÷50°C
Max. working pressure (static)	10 bar
Max. working pressure (dynamic)	5 bar
Max temperature input	85°C
Min. flow rate for stable temperature	4 l/min
TRADE PRICE	£ 88

The thermostatic valve increases the volume of hot water available compared to the capacity of the tank (defined as the equivalent volume).

The equivalent volume represents the litres of water available at 39°C, assuming the water inlet temperature is 15°C and the set temperature is 73°C.

Available water without valve (L)	30	50	80	100	150	200
Available water with valve (L)	51	85	125.5	170	250	340

Rointe efficient heating

WATER HEATING

2
YEARS
GUARANTEE
ON PRODUCT

SUPPORT TRIPOD



MODELS	TPKW001
DIMENSIONS	
Height (mm)	715
Width (mm)	420
COMPONENTS	
Legs (units)	x 3
Braces (units)	x 6
Plastic base (units)	x 3
CHARACTERISTICS	
Finishes	White RAL 9016
Compatible with	Rome, Siena & Geneva
Maximum supported weight (kg)	260
TRADE PRICE	£ 80

UNIVERSAL WALL SUPPORT



MODELS	KWSPTN01
DIMENSIONS	
Height (mm)	80
Width (mm)	470
MECHANICAL CHARACTERISTICS	
Finishes	White RAL 9016
Compatible with	Rome, Siena & Geneva
TRADE PRICE	£ 20



Rointe efficient heating