



## *Round Pin Socket Outlets*



The smooth modern lines of the Definity accessory plate will fit easily into traditional and contemporary designs alike.

All Definity Screwless Round Pin sockets are tested and approved to BS546 offering assured quality and safety.

**Round Pin Socket Outlets**

**Product Range**

**Finish Comparison**



**Brushed Steel (BS)**



**Matt Black (BK)**



**Polar White (PW)**



**Polished Chrome (CH)**



**Stainless Steel (SS)**

**Round Pin Socket Outlets**

**Product Range**

**Round Pin Socket Outlet Inserts**

<b>SIN034**</b>	15A Round Pin Socket Outlet Insert
<b>SIN038**</b>	5A Round Pin Socket Outlet Insert
<b>SIN039**</b>	2A Round Pin Socket Outlet Insert

**Round Pin Socket Outlet Cover Plates**

<b>SCP234##</b>	15A Round Pin Socket Outlet Cover Plate
<b>SCP038##</b>	5A Round Pin Socket Outlet Cover Plate
<b>SCP039##</b>	2A Round Pin Socket Outlet Cover Plate




SIN034PW




SIN038BK



SIN039PW

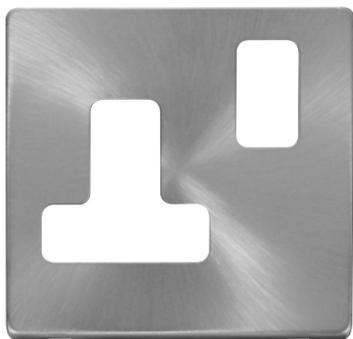

SCP234BS

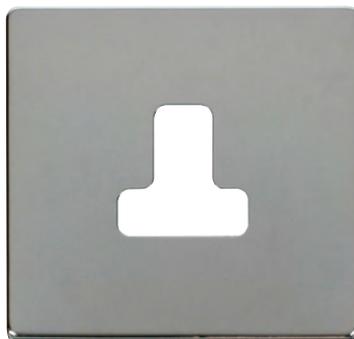

SCP238CH



SCP239SS

Errors & Omissions excluded. Specification is subject to change without notice. \*\* Denotes Insert Colour, ## Denotes Cover Plate Finish

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

**Telephone:** 01827 63454


**E-mail:** sales@scolmore.com, technical@scolmore.com

**Facsimile:** 01827 63362


**Website:** www.scolmore.com

**Round Pin Socket Outlets**

**Product Dimensional Drawings (mm)**

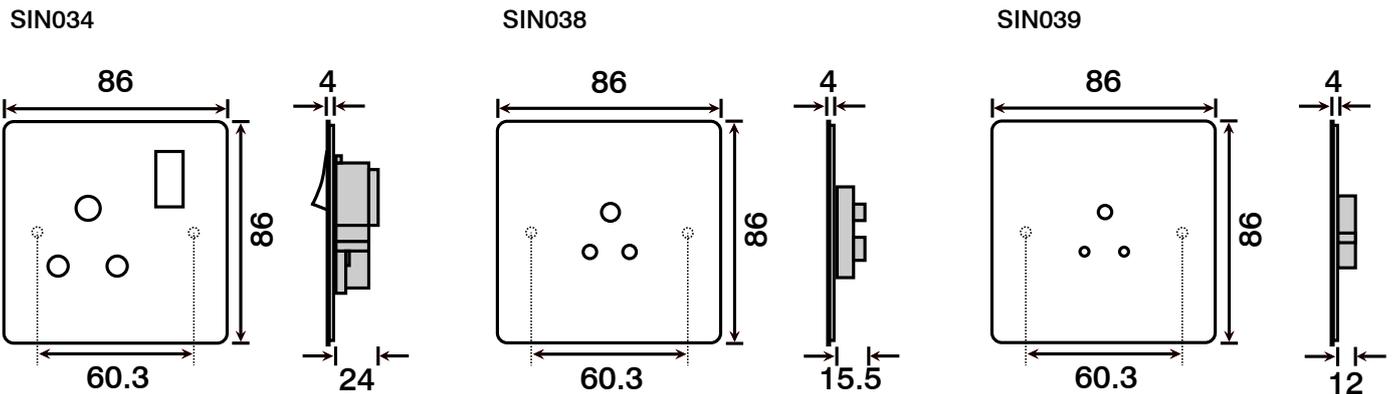

**Product Wiring Diagram**

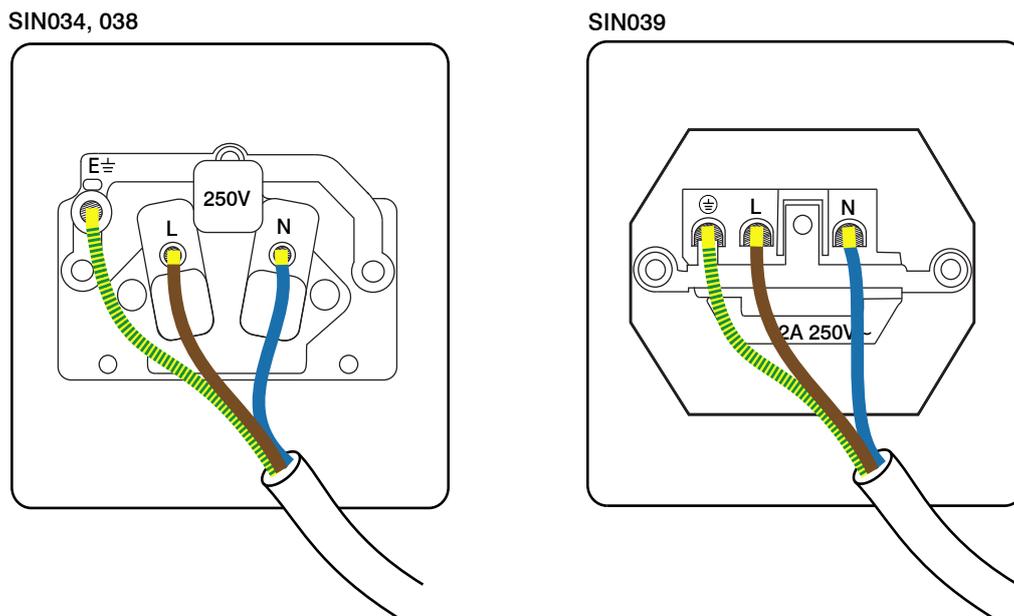

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

## Round Pin Socket Outlets

### Technical Specification

#### Round Pin Socket Outlets

<b>Material Composition</b>	Insert: Polycarbonate
	Rear Housing: Urea
	Terminals: Brass
	Earth Strap: Mild Steel
	Terminal Screws: Steel and Yellow Passivated
	Silver “on-lay” Copper / Brass Contacts
	Cover Plate: Coated Stainless Steel or Polycarbonate (PW & BK)
<b>Voltage</b>	240V~ 50Hz
<b>Current Rating</b>	15A / 5A / 2A
<b>Terminal Size</b>	5mm ø
<b>Torque Value</b>	2.0Nm (15A) / 1.2Nm (5A) / 0.4Nm (2A)
<b>Cable Size</b>	2 x 2.5mm <sup>2</sup> / 3 x 1.5mm <sup>2</sup>
<b>Back Box Depth</b>	35mm - 47mm
<b>Warranty</b>	10 Years
<b>IP Rating</b>	IP20
<b>Operational Temperature</b>	-5° to +40°C
<b>Standards</b>	The Low Voltage Directive 2006/95/EC BS 546:1950

### Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

### DECLARATION OF CONFORMITY

1. *Issuer Name* Scolmore International Limited
2. *Issuer Address* 1 Scolmore Park, Landsberg,  
Lichfield Road Industrial Estate,  
Tamworth, Staffordshire, B79 7XB
3. *Object(s) of Declaration* Definity Range
- a. *Group* Round Pin Sockets
- b. *Model No.* SIN034, SIN038, SIN039
4. *The object of the declaration described above is in conformity with the requirements of the following Legislations:*
- | Document No | Title                 |
|-------------|-----------------------|
| 2006/95/EC  | Low Voltage Directive |

5. *All products contained within the aforementioned comply with the relevant standards and requirements listed below.*

BS 546:1950

6. *I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.*

*In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008*

Signed, for and on behalf of: Scolmore International Limited



Steven Bettson BSc - Senior Technical Support Engineer

# CE 13