




CMA735
Locating socket



CMA736
Locating socket

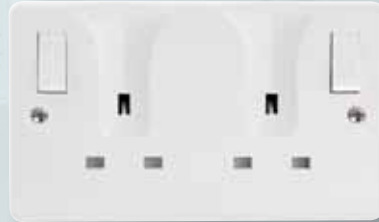

CMA771



CMA770

13A UK Switched Locating Socket Outlets

- CMA735** 13A 1G DP Switched Locating Socket
CMA736 13A 2G DP O/B Switched Locating Socket

13A Switched Socket with 2.1A USB Outlet

- CMA771** 13A 1G Switched Socket with 2.1A USB Outlet
CMA770 13A 2G Switched Socket with 2.1A USB Outlet

Standards: BS 1363

Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)

Standards: BS1363, BS5733, BS60950-1, EN61000-6-1, EN 61000-6-3

Back Box Depth: 570: 25mm, 571: 35mm **Cable Size:** 4 x 2.5mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)