
## Hamilton

## www.hamilton-litestat.com

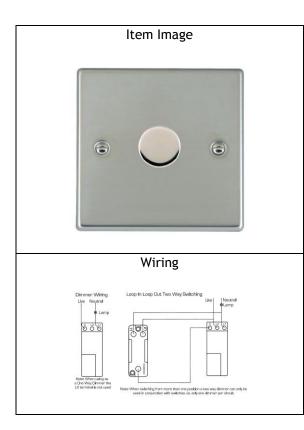

## <u>73 1X40</u>

Hartland Bright Steel Push On/Off Dimmer 1 gang 2 way 400W max 40W min. Standard Insert will be Bright Steel.

| Primary Range             | Hartland                               |  |
|---------------------------|--|--|
| Insert Type               | Leading Edge Resistive Dimmers         |  |
| Plate Finish              | Bright Steel                           |  |
| Frame Finish              |  |  |
| Switch Colour             | Bright Steel                           |  |
| Body & Switch Trim        |  |  |
| Height                    | Single = 88mm                          |  |
| Width                     | Single = 88mm                          |  |
| Depth                     | Single = 5mm                           |  |
| Fixing Hole Centres       | Box Fixing = 60.3mmBox Fixing = 60.3mm |  |
| Minimum Wall Box Depth    | 35mm                                   |  |
| Wattage                   | 400W                                   |  |
| Switched Poles            | Single                                 |  |
| Current Rating            | 1.66 Amp                               |  |
| Voltage                   | 220/250V AC                            |  |
| Max load                  | 400W resistive                         |  |
| Contact Gap Minimum       | n/a                                    |  |
| Terminal Capacity 1       | 2 x 1mm2                               |  |
| Terminal Capacity 2       | 2 x 1.5mm2                             |  |
| Terminal Capacity 3       |  |  |
| Terminal Capacity 4       |  |  |
| Terminal Capacity 5       |  |  |
| Earth Terminal Capacity 1 | 5 x 1mm2                               |  |
| Earth Terminal Capacity 2 | 4 x 1.5mm2                             |  |
| Earth Terminal Capacity 3 | 3 x 2.5mm2                             |  |
| Earth Terminal Capacity 4 | 1 x 4mm2 Multi-Strand                  |  |
| Earth Terminal Capacity 5 | 1 x 6mm2                               |  |
| Product Class 1           | Face plate must be earthed             |  |
| Ambient Operating         | -5° to +40°C                           |  |
| Temperature               |  |  |
| Recommended Location      | Indoor use only                        |  |
| Standard/Approval         | BS EN 60669-2-1                        |  |
| Patents and Trademarks    | Trade Mark No. 2344778                 |  |

| All products listed conform to current British or<br>European standards and the product information is<br>correct at the time of going to press. | All accessories are manufactured under an accredited BS EN ISO 9001 : 2008 Quality System.                       | It is the policy of the company to continually<br>improve products as part of our development<br>programme.<br>Therefore, we reserve the right to alter designs<br>and dimensions without prior notice. |
|--|--|---|
| Illustrations and diagrams are reproduced within<br>the limitations of reproductions and printing<br>processes are not binding.                  | Due to manufacturing processes we cannot<br>guarantee an exact colour match and shadings of<br>certain finishes. | Correct as at August 2012<br>E&OE   |

R Hamilton & Co Ltd • Quarry Industrial Estate • Mere • Wiltshire • BA12 6LA • UK T: +44 (0)1747 860088 • F: +44 (0)1747 861032 • E: info@hamilton-litestat.com www.hamilton-litestat.com

Directors: R Hamilton • I Hamilton • RL Haines • CP Savory • AMH Hamilton (Secretary) Registered Office: Cedar House • Breckland • Linford Wood • Milton Keynes • MK14 6EX • Buckinghamshire Registered in London No. 941624 • VAT Registration No. 222 6607 84

