



Item Image

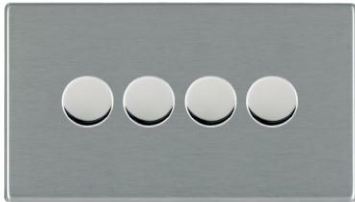

Wiring

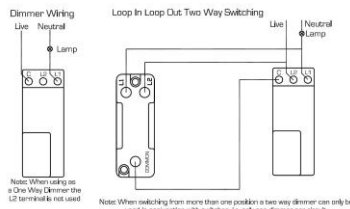

## 74C 4X40

Hartland CFX Satin Steel Push On/Off Dimmer 4 gang 2 way 400W max 40W min. Standard Insert will be Satin Steel.

Primary Range	Hartland CFX
Insert Type	Leading Edge Resistive Dimmers
Plate Finish	Satin Steel
Frame Finish	
Switch Colour	Satin Steel
Body & Switch Trim	
Height	Double = 86mm
Width	Double = 145mm
Depth	Double = 5mm
Fixing Hole Centres	Box Fixing = 120.6mmBox Fixing = 120.6mm
Minimum Wall Box Depth	35mm
Wattage	300W per gang
Switched Poles	Single
Current Rating	1.25 Amps per gang
Voltage	220/250V AC
Max load	300W resistive per gang
Contact Gap Minimum	n/a
Terminal Capacity 1	2 x 1mm <sup>2</sup>
Terminal Capacity 2	2 x 1.5mm <sup>2</sup>
Terminal Capacity 3	
Terminal Capacity 4	
Terminal Capacity 5	
Earth Terminal Capacity 1	5 x 1mm <sup>2</sup>
Earth Terminal Capacity 2	4 x 1.5mm <sup>2</sup>
Earth Terminal Capacity 3	3 x 2.5mm <sup>2</sup>
Earth Terminal Capacity 4	1 x 4mm <sup>2</sup> Multi-Strand
Earth Terminal Capacity 5	1 x 6mm <sup>2</sup>
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5° to +40° C
Recommended Location	Indoor use only
Standard/Approval	BS EN 60669-2-1
Patents and Trademarks	CFX is a Registered Trade Mark No 2398667 Hartland CFX is a Registered Design under Reference Nos. R21 = 3023446 SS2 =3023445

All products listed conform to current British or European standards and the product information is correct at the time of going to press.

All accessories are manufactured under an accredited BS EN ISO 9001 : 2008 Quality System.

It is the policy of the company to continually improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.

Illustrations and diagrams are reproduced within the limitations of reproductions and printing processes are not binding.

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.

Correct as at August 2012  
E&OE

R Hamilton & Co Ltd • Quarry Industrial Estate • Mere • Wiltshire • BA12 6LA • UK  
T: +44 (0)1747 860088 • F: +44 (0)1747 861032 • E: info@hamilton-litestat.com  
www.hamilton-litestat.com

Directors: R Hamilton • I Hamilton • RL Haines • CP Savory • AMH Hamilton (Secretary)  
Registered Office: Cedar House • Breckland • Linford Wood • Milton Keynes • MK14 6EX • Buckinghamshire  
Registered in London No. 941624 • VAT Registration No. 222 6607 84



BS EN ISO 9001:2008  
CERT. No. FM11238

