

LOADSTAR 125A TYPE B DISTRIBUTION BOARDS

- Incoming options - **order separately**:
 - 125A Switch Disconnector TP/4P - 50mm²
 - 100A RCCB 4P - 35mm²
 - 125A Direct Cable - 50mm²
- Integral metering available with Meter Ready (MR) board utilising a TP Incoming option
- Busbars rated at 125A
- Full compliment of Neutral & Earth terminals Incoming maximum 70mm² Outgoing maximum 25mm²
- Allows the fixture of dual Earth bars
- Clean Earth kit available
- All boards supplied as standard with hinged outer door and catch (lock is optional extra) and removable top/bottom gland plates
- Neutral busbar supports incorporate an integral MCB end stop
- BS EN 60439-3




18LS08MR



18LS08D

LOADSTAR 125A INCOMER OPTIONS

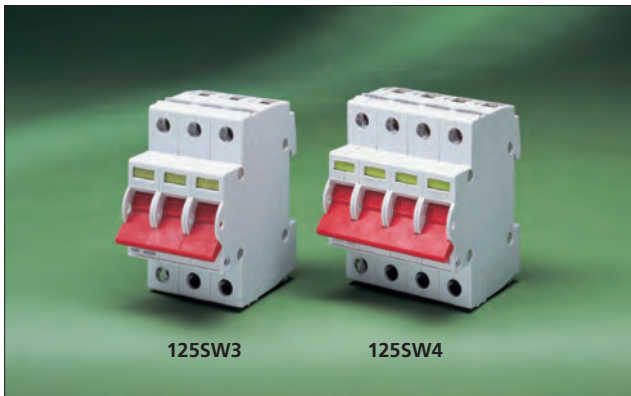

125SW3

125SW4




100SW2

18R100/30/4



18LK125



18LKD70

LOADSTAR 125A INCOMING OPTIONS

Order Device and Kit (where required) separately.

Switch Disconnector, modular (50mm ²)	Device	Kit	
40A TP	40SW3		
63A TP	63SW3	None	
100A TP	100SW3	Required	
125A TP	125SW3		
40A 4P	40SW4	18LK125	
63A 4P	63SW4	18LK125	
100A 4P	100SW4	18LK125	
125A 4P	125SW4	18LK125	
100A DP (TP to SP conversion)	100SW2	18LKTPSP	
125A DP (TP to SP conversion)	125SW2	18LKTPSP	
RCCB (35mm ²)	Device	Kit	
40A 4P	30mA	18R40/30/4	18LK125
	100mA	18R40/100/4	18LK125
	300mA	18R40/300/4	18LK125
63A 4P	30mA	18R63/30/4	18LK125
	100mA	18R63/100/4	18LK125
	300mA	18R63/300/4	18LK125
100A 4P	30mA	18R100/30/4	18LK125
	100mA	18R100/100/4	18LK125
	300mA	18R100/300/4	18LK125
100A 4P 100mA Time Delay	241/100TD	18LK125	
100A DP 30mA	18R100/30/2	18LKTPSP	
100A DP 100mA	18R100/100/2	18LKTPSP	
100A DP 100mA Time Delay	18R100/100/2TD	18LKTPSP	

Special oversize Incoming Cable connection kit for use with TP Sw Disc above.

Accommodate up to 120mm² TP Sw Disc only. **18LKD120**

Direct Connection	Device	Kit
Incoming Cable Connection (50mm ²)	18LKD50	None
Outgoing Cable Connection Kit/Shroud (50mm ²) (Set of 3 Cable Clamps + Shroud)	18LKD70	Required