

POWERTRACK

A range of 63Amp powertrack complete with integral mounting brackets and pre-assembled end caps and couplers for ease of installation.


Product information

- Each length of track comes complete with pre-assembled coupler, end cap and floor mounting brackets.
- Maximum 63Amp rating
- Tap-offs are key and colour coded for Standard and CE (Clean Earth)
- Tap-offs are 32Amp rated or fused at 13Amp
- Adhesive dust covers protect outlets



Powertrack and fittings are independently tested by Intertek

| Identification | |
|---|----|
| Standard | CE |
| Standard: Grey CE (Clean Earth): Red | |

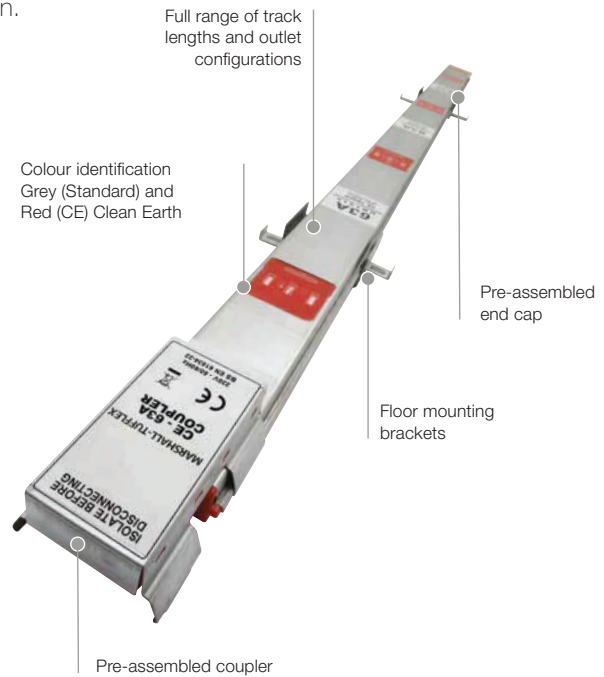

To calculate powertrack lengths required for different floor layouts refer to table on opposite page.

Powertrack
Standard



| code | length | Number of outlets | pitch (mm) | pack |
|--------|--------|-------------------|------------|------|
| UN1112 | 1.2m | 4 | 300 | 2 |
| UN1118 | 1.8m | 6 | 300 | 2 |
| UN1114 | 2.4m | 8 | 300 | 2 |
| UN1116 | 3.6m | 12 | 300 | 2 |

Powertrack
CE (Clean Earth)










| code | length | Number of outlets | pitch (mm) | pack |
|--------|--------|-------------------|------------|------|
| UN1212 | 1.2m | 4 | 300 | 2 |
| UN1218 | 1.8m | 6 | 300 | 2 |
| UN1214 | 2.4m | 8 | 300 | 2 |
| UN1216 | 3.6m | 12 | 300 | 2 |

Standard
Rated current 63Amp



Low Noise (CE)
Rated current 63Amp



| Feed unit | Interlink | | Interlink | | Tap-off units | | Tap-off units | | Tap-off units | | Tap-off units | | |
|---|---|------|---|------|--|--------|---|--------|---|--------|---|--------|----|
| Female | Length | 1.2m | Length | 2.4m | Unfused | 32Amp | Fused | 13Amp | Unfused | 32Amp | Fused | 13Amp | |
| Pack | 1 | Pack | 1 | Pack | 1 | Length | 3m | Length | 3m | Length | 5m | Length | 5m |
| | | | | | | Pack | 1 | Pack | 1 | Pack | 1 | Pack | 1 |
|  |  | |  | |  | |  | |  | |  | | |
| UN3100 | UN5102 | | UN5104 | | UN7113 | | UN7123 | | UN7115 | | UN7125 | | |
| UN3200 | UN5202 | | UN5204 | | UN7213 | | UN7223 | | UN7215 | | UN7225 | | |

All tap-off units comply with the latest version of the Wiring Regulations Section 543 (High Integrity Earthing).

Powertrack – run length component chart

To determine the number and size of track required for a given area, select your total run length (in metres) from the left hand column, then find the correct track combinations along that row.

| Total run in metres | Track lengths required | | | |
|---------------------|------------------------|-----|-----|-----|
| 3.6 | 3.6 | | | |
| 4.2 | 1.8 | 2.4 | | |
| 4.8 | 2.4 | 2.4 | | |
| 5.4 | 3.6 | 1.8 | | |
| 6.0 | 3.6 | 2.4 | | |
| 6.6 | 2.4 | 2.4 | 1.8 | |
| 7.2 | 3.6 | 3.6 | | |
| 7.8 | 3.6 | 2.4 | 1.8 | |
| 8.4 | 3.6 | 3.6 | 1.2 | |
| 9.0 | 3.6 | 3.6 | 1.8 | |
| 9.6 | 3.6 | 3.6 | 2.4 | |
| 10.2 | 3.6 | 3.6 | 1.8 | 1.2 |
| 10.8 | 3.6 | 3.6 | 3.6 | |
| 11.4 | 3.6 | 3.6 | 2.4 | 1.8 |
| 12.0 | 3.6 | 3.6 | 3.6 | 1.2 |

| Total run in metres | Track lengths required | | | | | |
|---------------------|------------------------|-----|-----|-----|-----|-----|
| 12.6 | 3.6 | 3.6 | 3.6 | 1.8 | | |
| 13.2 | 3.6 | 3.6 | 3.6 | 2.4 | | |
| 13.8 | 3.6 | 3.6 | 3.6 | 1.8 | 1.2 | |
| 14.4 | 3.6 | 3.6 | 3.6 | 3.6 | | |
| 15.0 | 3.6 | 3.6 | 3.6 | 2.4 | 1.8 | |
| 15.6 | 3.6 | 3.6 | 3.6 | 3.6 | 1.2 | |
| 16.2 | 3.6 | 3.6 | 3.6 | 3.6 | 1.8 | |
| 16.8 | 3.6 | 3.6 | 3.6 | 3.6 | 2.4 | |
| 17.4 | 3.6 | 3.6 | 3.6 | 3.6 | 1.8 | 1.2 |
| 18.0 | 3.6 | 3.6 | 3.6 | 3.6 | 3.6 | |
| 18.6 | 3.6 | 3.6 | 3.6 | 3.6 | 2.4 | 1.8 |
| 19.2 | 3.6 | 3.6 | 3.6 | 3.6 | 3.6 | 1.2 |
| 19.8 | 3.6 | 3.6 | 3.6 | 3.6 | 3.6 | 1.8 |

We recommend that no single run of Powertrack exceeds 20 metres.