

TECHNICAL DATASHEET

APF032AL/02

1W IP65 Low Level LED Pathfinder Bidirectional



PRODUCT FEATURES


Anti-Glare Low Level Lighting
Frosted Glass for Optimum Light Distribution
Ideal for Stair Lighting and Commercial
Lighting
Ultra Slim Profile

Driveover rated at 2 Metric Tonnes When Used in
32mm Mounting Sleeve (AGL/MS032)



Nano-Drive

A Functional and Dimmable 350mA
LED Driver that fits through a 28mm hole!
Switches 1-4W and Dims 2-4W.
Code: ADRCC350NANOTD/2-4

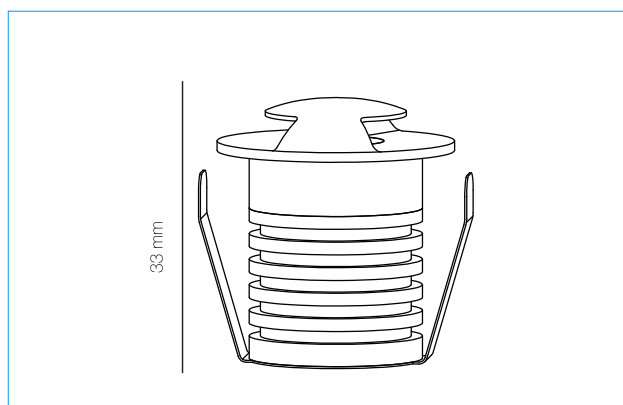

SERIES WIRING 350mA	32mm CUTOUT
CE	III
✓ ROHS	ErP Compliant
IP65	3 Year Guarantee

APF032AL/02

This luminaire contains built-in LED lamps.

LED

The lamps cannot be changed in the luminaire.

874/2012

PRODUCT CODE	APF032AL/02/30	APF032AL/02/40
Finish	Aluminium	Aluminium
Power	1W	1W
Lumens	≤80 lm	≤90 lm
IP	IP65	IP65
Colour	3000K	4000K