




Qba

THORN

96547097 Qba 1 70W 240V HIT-DE S/S/L

RX7s	 70W HIT-DE-CE	IP65	IK08			850°C
------	---	------	------	---	---	-------

A compact discharge floodlight for architectural lighting, available in two sizes, with a choice in beam structures, and with a full range of accessories

A compact discharge floodlight for architectural lighting with IP65 optical and gear compartment, SC1 class. Grey powder coated die-cast aluminium body with Flat Glass enclosure.

Projector is fully adjustable on a short stirrup, locked via central 8mm diameter allen screws.

Symmetric floodlighting distribution with a aluminium - satinbrite reflector.

This product is suitable for a 70 W HIT-DE-CE lamp.


Available in other colours as special (any RAL number, brick brown or pale sand).

Dimensions: 227 x 188 x 212 mm


Weight: 4.6 kg



TLG_QBAL_F_S1.jpg

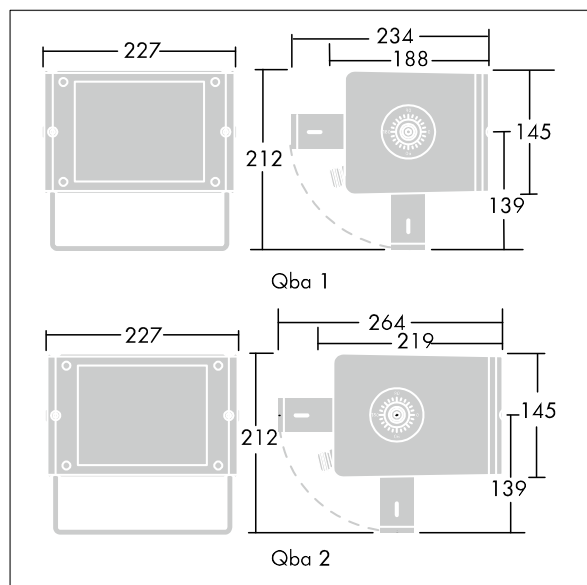

TLG_QBAL_M_LD1.wmf

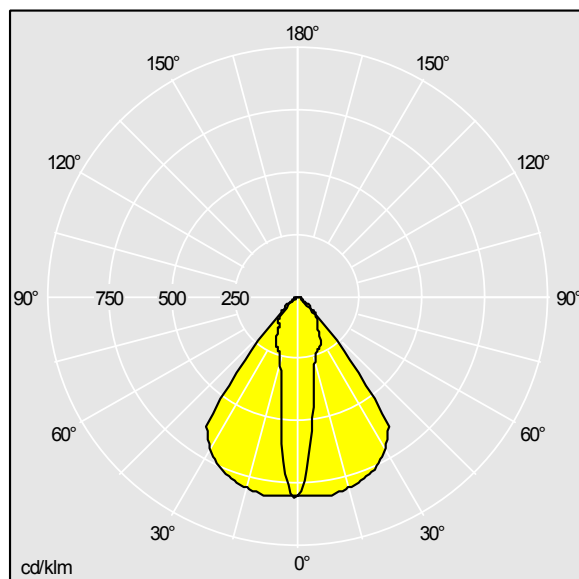

TLG_LA_QB1R3F.idt

Lamp position:STD - standard

Lamps:1 x HIT-DE-CE / 70W

Total luminous flux:6300 lm

Luminaire efficacy:44 lm/W

Colour Rendering Index min.:80

Ballast:MAG Tridonic OMBI PA

Connected Load:85 W Lambda = 0.98

LOR: 0,60 ULOR: 0,00 DLOR: 0,60