

VELA COMPACT LED FIRE RATED DIMMABLE DOWNLIGHTS

- + Certified for 30, 60 or 90 minute fire rated ceilings
 - + Compact low profile
 - + Includes LED dimmable driver
 - + High efficiency
 - + 3,000K & 4,000K options
 - + Safe design - Insulation can be placed over fitting
- Tested by the LIA Laboratory



TILT



FIXED

Part No	Description
LEDDLCEZPC	Bezel for Fixed Downlight - Polished Chrome
LEDDLCEZSC	Bezel for Fixed Downlight - Satin Chrome



Tel +44 (0) 1279 772 772
 Fax +44 (0) 1279 422 007
 www.greenbrook.co.uk



	LEDDL3000W	LEDDL4000W	LEDDL3000W	LEDDL4000W	LEDDL3000PC	LEDDL4000PC	LEDDL3000SC	LEDDL4000SC
Product Finish	White	White	White	White	Polished Chrome	Polished Chrome	Satin Chrome	Satin Chrome
Downlight Style	Fixed			Tilt				
Cut out	60mm			76mm				
Depth	H51 x W80mm			H40 x W86.5mm				
Product weight	0.18kg	0.18kg	0.22kg	0.22kg	0.22kg	0.22kg	0.22kg	0.22kg
Barcode	5012739 644412	5012739 644429	5012739 644450	5012739 644467	5012739 644474	5012739 644481	5012739 644498	5012739 644504
IP Rating	IP65			IP44				
Lamp Type	COB LED							
Beam Angle	55° Beam Angle			40° Beam Angle				
Tilt Angle	N/A			50° Inclusive (25° each side)				
Colour Temp	3,000K	4,000K	3,000K	4,000K	3,000K	4,000K	3,000K	4,000K
Class	II	II	II	II	II	II	II	II
Luminaire Lumens Output	600lm, 86 lm/W	620lm, 89 lm/W	600lm, 86 lm/W	620lm, 89 lm/W	600lm, 86 lm/W	620lm, 89 lm/W	600lm, 86 lm/W	620lm, 89 lm/W
Voltage	230V ~ 50Hz							
Wattage	7W							
CRI	>80							
Ballast Type	LED Driver							
Guarantee	3 year							
Certification & Conformity	Conforms to Part B, C, E & L							

VELA COMPACT RANGE

Dimmers

The VELA **Compact** range of downlights are designed to be compatible trailing edge dimmers. GreenBrook have tested a selection of dimmers for compatibility with our product range...



Dimmer Specification		Number of Fittings											
Manufacturer Name	Dimmer Model	1	2	3	4	5	6	7	8	9	10	11	12
Varilight	JQP401W	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Hamilton	H-LEDSTAT	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Hamilton	LEDITB100	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Zano	ZGRIDLED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Schneider	GGBL6012LS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	x
Danlers	DQDGEU400W	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

N.B GreenBrook are not responsible for any changes of specification of these dimmer models since the time of testing. Any component tolerances or changes of specification remain the responsibility of the dimmer manufacturer and are beyond our control.

Thermal Testing

VELA Compact downlights have been independently tested to the British Standard 60598-1 Clause 12.4 by the Lighting Industry Association. Contact us for copies of the full test report.



Insulation can be placed directly over the fitting

LED 3W Emergency Driver - suitable for use with VELA *Advance* and VELA **Compact**


- ▶ Built in battery supplying 3 hours emergency operation in light of a mains failure
- ▶ Quick & easy to connect
- ▶ Compact & lightweight - screwless assembly
- ▶ Separate small green LED indicator giving status of battery charge
- ▶ Bezel mount for LED - for ease of installation in ceilings



Part No: LEDLEP

20 Amp Lighting Connector - suitable for use with VELA *Advance* and VELA **Compact**

- ▶ Time saving product for all your connecting requirements
- ▶ Male connector 1 x 2.5mm² 3 core flex and screw cord grip
- ▶ Female connector 3 x 2.5mm² twin and earth and loop terminal

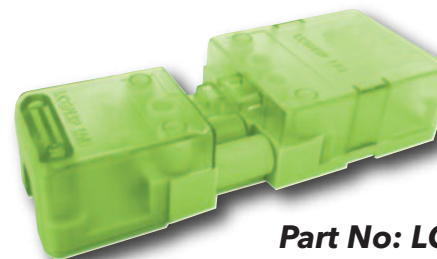

Box Qty
50

Part No: LCGN3P

