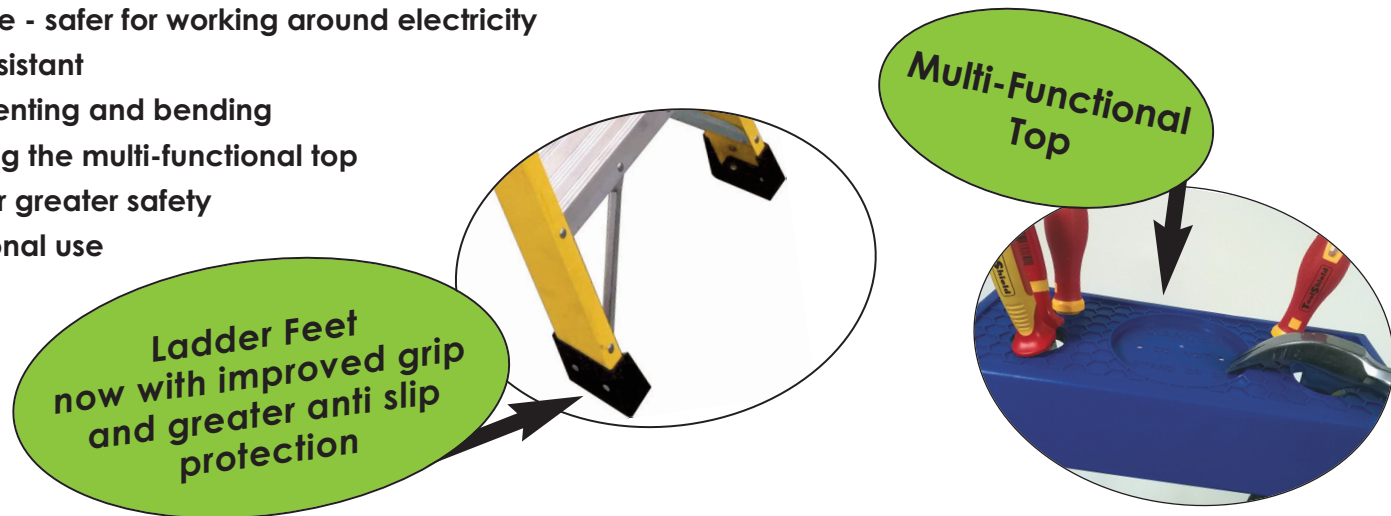


Built for use in tough environments and designed to handle the wide variety of tasks required on a jobsite, whilst ensuring optimum safety and convenience for the user.

- ▶ Fibreglass ladder rails are non-conductive - safer for working around electricity
- ▶ Lightweight, Strong, Heat and Weather resistant
- ▶ Durable - offers excellent resistance to denting and bending
- ▶ Safely secure tools at working height using the multi-functional top
- ▶ Non slip steps and rubber non-slip feet for greater safety
- ▶ Conforms to BS EN-131-1-2-3 for professional use
- ▶ Voltage tested to 35000V





	LAD4	LAD5	LAD6	LAD7	LAD8	LAD9	LAD10
Product Finish	Fibre Glass	Fibre Glass	Fibre Glass	Fibre Glass	Fibre Glass	Fibre Glass	Fibre Glass
Description	No of Steps 3	No of Steps 4	No of Steps 5	No of Steps 6	No of Steps 7	No of Steps 8	No of Steps 9
	Useable Steps 1	Useable Steps 2	Useable Steps 3	Useable Steps 4	Useable Steps 5	Useable Steps 6	Useable Steps 7
Product Dimensions	See Overleaf Main Ladder Specification Charts						
Product weight	6.1kg	7.5kg	8.7kg	10.5kg	11.6kg	13.7kg	14.9kg
Barcode	5012739650567	5012739650574	5012739650574	5012739650598	5012739650604	5012739650611	5012739650628
Guarantee	1 Year						
Certification & Conformity	BS EN 131-1-2-3						


SWINGBACK LADDER RANGE**LADDER SPECIFICATION:****BS EN 131**


For professional use


**GREEN
BROOK**
ELECTRICAL**Max Load
150Kg****LAD8**


LAD4	
	
No of steps	3
Useable Steps	1
Weight	6.1kg
Max Load	150kg
L1 (mm)	1140
L2 (mm)	875
Pack Size (mm) (inc Packing)	L1240 x W510 x D170
Open Height (mm)	1060
Useable Step Height (mm)	270


LAD5	
	
No of steps	4
Useable Steps	2
Weight	7.5kg
Max Load	150kg
L1 (mm)	1440
L2 (mm)	1070
Pack Size (mm) (inc Packing)	L1540 x W535 x D170
Open Height (mm)	1337
Useable Step Height (mm)	548

LAD6	
	
No of steps	5
Useable Steps	3
Weight	8.7kg
Max Load	150kg
L1 (mm)	1740
L2 (mm)	1265
Pack Size (mm) (inc Packing)	L1840 x W580 x D170
Open Height (mm)	1615
Useable Step Height (mm)	826

LAD7	
	
No of steps	6
Useable Steps	4
Weight	10.5kg
Max Load	150kg
L1 (mm)	2040
L2 (mm)	1465
Pack Size (mm) (inc Packing)	L2140 x W615 x D170
Open Height (mm)	1893
Useable Step Height (mm)	1104

LAD8	
	
No of steps	7
Useable Steps	5
Weight	11.6kg
Max Load	150kg
L1 (mm)	2340
L2 (mm)	1665
Pack Size (mm) (inc Packing)	L2440 x W650 x D170
Open Height (mm)	2170
Useable Step Height (mm)	1382

LAD9	
	
No of steps	8
Useable Steps	6
Weight	13.7kg
Max Load	150kg
L1 (mm)	2640
L2 (mm)	1855
Pack Size (mm) (inc Packing)	L2740 x W690 x D170
Open Height (mm)	2450
Useable Step Height (mm)	1660

LAD10	
	
No of steps	9
Useable Steps	7
Weight	14.9kg
Max Load	150kg
L1 (mm)	2940
L2 (mm)	2055
Pack Size (mm) (inc Packing)	L3040 x W720 x D170
Open Height (mm)	2727
Useable Step Height (mm)	1938