

PowerBreaker **PROTEKT**

IP66 Rated Weatherproof Switches - PSW1G2W & PSW2G2W

PowerBreaker Protekt products are suitable for use outdoors in severe conditions of rain and water spray as well as dust contamination to IP66 as defined by BS EN 60529. All products are for use with a 230V 50Hz supply.

INSTALLATION GUIDE - IMPORTANT

This product should be installed by a competent person and in accordance with the current IET Wiring Regulations. If in doubt, consult a qualified electrician

Important -

- Always disconnect the mains supply via the switch in the main fuse board or consumer unit before commencing any electrical work.
- Ensure that all terminal screws are fully tightened and that earth wires are sleeved and that no bare wires are showing.
- Cable glands must be used which maintain the IP rating. The warranty is invalid if IP rating is not maintained.


PSW1G2W & PSW2G2W Installation & Operating Instructions

A 1-way switch allows light control from one location only, 2-way switches control lighting from 2 separate locations. A 2-way switch may also be used as a 1-way switch by wiring in accordance with instructions.

1. The mounting surface must be flat and free from grease, dirt or loose material.
2. Ascertain the required position for the unit. Remove rocker switch plate/s (grey) by inserting a small flat bladed screwdriver either side of the switch and lever off. Unscrew the 4 screws and remove the switch cover thereby exposing the switch module by pulling firmly.
3. If necessary take the back box and drill a small hole through the drainage point that will be at the lowest point when mounted. This is necessary to ensure that any residual moisture or condensation has an escape route at the back of the box.
4. Use a suitable drill/wall plug for the surface on which you are mounting your weatherproof switch and use No.8 countersunk screws (not supplied) to secure the back box through the 4 corner holes.
5. Remove a suitable cable entry cover by pushing through from the inside of the back box. If circumstances permit the best entry point for the supply cable is the bottom one.
6. If cable entry is via 20mm conduit use the conduit gland to secure the conduit to the back box. If entry of cable is to be direct use a suitable IP rated cable gland.
7. Use only mains cable of sufficient rating for your application.
8. Strip back insulation from each wire and connect to appropriate terminals. Ensure earth conductor is sleeved and secured to the earth terminal.
9. Once the unit has been wired, re-fit the switch module to the base unit and re-secure the switch cover. Tighten with the 4 screws.
10. Push rocker switch plate/s (grey) back into position ensuring correct orientation.


LIGHT SWITCH 2-WAY


Lighting circuit showing 1-way switching



LIGHT SWITCH 2-WAY

Typical lighting circuit showing 2-way switching

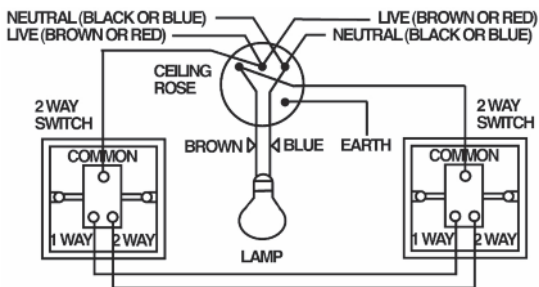

- + **L LIVE = (Brown or Red)**
- **N NEUTRAL = (Black or Blue)**
-  **E EARTH = (Green/Yellow)**

Cleaning

If the unit needs cleaning it should be disconnected from the mains supply. Wipe the surface with a dry cloth. Do not use a damp or wet cloth or a solvent based cleaning agent, as this may damage or impair the safety of the product.

Disclaimer

This equipment is intended for domestic & light commercial use only. It must be installed in accordance with these fitting instructions. It should be fixed in the approved & conventional way to a solid or suitably safe surface. The equipment should be connected to a mains supply of the appropriate voltage (indicated on the product). If you are unsure, consult a qualified electrician before fitting. No liability can be accepted if this product is installed or used in any other way.

PLEASE NOTE: Electricity is dangerous and can kill. If you are in any doubt of how to fit your product or there appears to be damage to the wiring, please consult a qualified electrician.

TECHNICAL INFORMATION

Rating:	10AX, 230 ~240V 50Hz
Working Temp:	-5°C - 40°C
Dimensions:	W97 x H97 x 65mm
Conforms To:	BS EN 60669-1 & BS EN 61058-1

GUARANTEE

**Your PowerBreaker Protekt IP66 Switch
is guaranteed for 5 years from
the date of purchase.**

This is in addition to your statutory rights.

Please keep these instructions for future reference.

INSTALLER - Please pass instruction manual onto the owner of the unit.



**GREEN
BROOK**
ELECTRICAL
WEST ROAD . HARLOW
ESSEX . CM20 2BG . UK
info@greenbrook.co.uk
www.greenbrook.co.uk