

Residential floodlights.

01604 495 151
collingwoodlighting.com

 @collingwoodLED
 /collingwoodlighting
 collingwoodled



GUARANTEE / WARRANTY

3 year extended warranty

FEATURES & BENEFITS

Colour switchable
IP44 (PIR version)
115lm/W
180° tilt
360° rotation - complete adjustability
Supplied with 1m cable
25,000 hours L70 / B50
Flicker free
Wide 120° beam angle, reducing the number of fittings per area required
PIR override

Beam angle: C0/C180 C90/C270

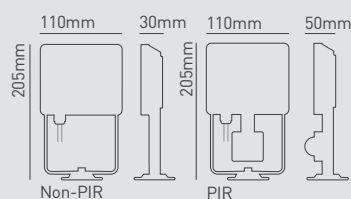

FL01

10W colour switchable floodlight

FEATURES

Wattage	10W
IP rating	IP65
IK rating	IK07
Colour flexibility	Colour switchable
Tilttable	180°
Rotatable	360°
UGR	UGR 14
Dimmable	No
Input	Mains AC
LED lifetime	25,000h
SDCM	5SDCM
Flicker free	Yes

INSTALLATION INFORMATION

Inrush current	10A 0.262ms
Construction material	Black painted cast aluminium
Weight	440g
Maximum ambient temperature	40°C
Electric class (1, 2, 3)	1

PHOTOMETRICS @ 25°C

Product code	Finish	Sensor	Colour	Beam angle	CRI	lm	lm/W	lx at 1m
FL01BXCS	Black	Non PIR sensor	6500K	120°	>80Ra	1100	110	463
			4000K	120°	>80Ra	1150	115	484
			3000K	120°	>80Ra	1000	100	421
FL01BPCS	Black	PIR sensor	6500K	120°	>80Ra	1100	110	463
			4000K	120°	>80Ra	1150	115	484
			3000K	120°	>80Ra	1000	100	421

WIRING INFORMATION

Cable / flying lead	1m H05RN-F rubberised cable 3x1.0mm² Ø7mm
Type of wiring required	Parallel

ACCESSORIES

N/A	No accessories required
-----	-------------------------