



ACADEMY

- Ideal replacement for linear fluorescent
- Designed for surface mounting in office and educational environments
- Steel backplate with polycarbonate diffuser, secured by screwed endcaps
- Uses high quality opal prism diffuser for reduced glare
- Suitable for suspended mounting, see page 18 (LWSK415 ordered separately)
Available with integrated micro-wave sensor, in standard or corridor mode

4000K
NEUTRAL
WHITE

50,000
HOURS

WHITE
FINISH




OPAL PRISM

CAT NO.	DRIVER	SIZE	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W	CURRENT
LAC12P22S40	Standard	4ft / 1260mm	2200	22W	100	900mA
LAC12P22E40	Emergency	4ft / 1260mm	2200	22W	100	900mA
LAC12P22D40	Dimmable	4ft / 1260mm	2200	22W	100	900mA
LAC12P22ED40	Emergency Dim	4ft / 1260mm	2200	22W	100	900mA
LAC12P22S40MW	Microwave	4ft / 1260mm	2200	22W	100	900mA
LAC12P40S40	Standard	4ft / 1260mm	4000	39W	103	1050mA
LAC12P40E40	Emergency	4ft / 1260mm	4000	39W	103	1050mA
LAC12P40D40	Dimmable	4ft / 1260mm	4000	39W	103	1050mA
LAC12P40ED40	Emergency Dim	4ft / 1260mm	4000	39W	103	1050mA
LAC12P40S40MW	Microwave	4ft / 1260mm	4000	39W	103	1050mA

CAT NO.	DRIVER	SIZE	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W	CURRENT
LAC15P32S40	Standard	5ft / 1560mm	3200	31W	103	1050mA
LAC15P32E40	Emergency	5ft / 1560mm	3200	31W	103	1050mA
LAC15P32D40	Dimmable	5ft / 1560mm	3200	31W	103	1050mA
LAC15P32ED40	Emergency Dim	5ft / 1560mm	3200	31W	103	1050mA
LAC15P32S40MW	Microwave	5ft / 1560mm	3200	31W	103	1050mA
LAC15P60S40	Standard	5ft / 1560mm	6000	58W	103	1400mA
LAC15P60E40	Emergency	5ft / 1560mm	6000	58W	103	1400mA
LAC15P60D40	Dimmable	5ft / 1560mm	6000	58W	103	1400mA
LAC15P60ED40	Emergency Dim	5ft / 1560mm	6000	58W	103	1400mA
LAC15P60S40MW	Microwave	5ft / 1560mm	6000	58W	103	1400mA

CAT NO.	DRIVER	SIZE	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W	CURRENT
LAC18P45S40	Standard	6ft / 1825mm	4500	46W	98	1400mA
LAC18P45E40	Emergency	6ft / 1825mm	4500	46W	98	1400mA
LAC18P45D40	Dimmable	6ft / 1825mm	4500	46W	98	1400mA
LAC18P45ED40	Emergency Dim	6ft / 1825mm	4500	46W	98	1400mA
LAC18P45S40MW	Microwave	6ft / 1825mm	4500	46W	98	1400mA
LAC18P80S40	Standard	6ft / 1825mm	8000	85W	94	1050mA
LAC18P80E40	Emergency	6ft / 1825mm	8000	85W	94	1050mA
LAC18P80D40	Dimmable	6ft / 1825mm	8000	85W	94	1050mA
LAC18P80ED40	Emergency Dim	6ft / 1825mm	8000	85W	94	1050mA
LAC18P80S40MW	Microwave	6ft / 1825mm	8000	85W	94	1050mA

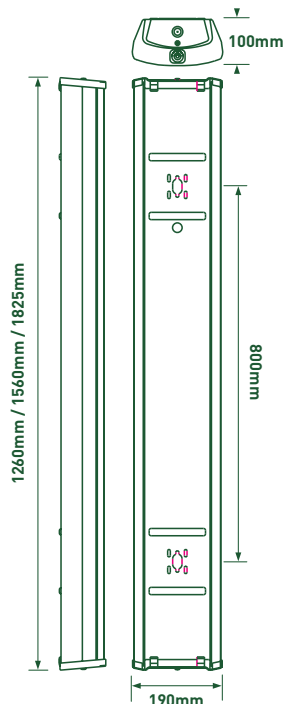

CLEAR PRISM - T8

- Fitted with LED T8 Tubes
- Integrated driver

4000K
NEUTRAL
WHITE

30,000
HOURS

WHITE
FINISH



CAT NO.	DRIVER	SIZE	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W
LACT12P38S40	Standard	4ft / 1260mm	3800	48W	80
LACT12P38E40	Emergency	4ft / 1260mm	3800	48W	80
LACT15P51S40	Standard	5ft / 1560mm	5120	64W	80
LACT15P51E40	Emergency	5ft / 1560mm	5120	64W	80
LACT18P64S40	Standard	6ft / 1825mm	6400	80W	80
LACT18P64E40	Emergency	6ft / 1825mm	6400	80W	80