
Swift LED Bulkhead

Supplied c/w Legend and Integral Driver





- Small and unobtrusive LED bulkhead
- Supplied with self-adhesive legend
- Optic design provides optimum performance for escape route lighting
- Side and rear cable entries
- Screwless gear tray for ease of installation
- Viewing distance 17 metres





- 1 lux minimum must be used for all marked emergency escape routes, to be measured down the centre line of the escape route itself
- 0.5 lux minimum must be used for areas larger than 60m², the maximum value is to be measured across the area excluding 0.5 metre border around the edge of the room
- Explanation of the symbols:-Transverse Wall Distance to wall from side of fitting Transverse - Transverse Side to side spacing Axial - Wall

Distance to wall from end of fitting

Axial - Axial

End to end spacing

LED Information


Total (W)	3W
Lumens Delivered	
Emergency Mode	94lm
Standard Mode	147lm
CCT	6500K
Input	230V
Hertz	50/60Hz
Operating Temp	0C° to 45C°










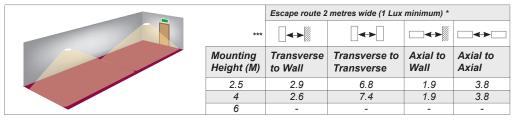

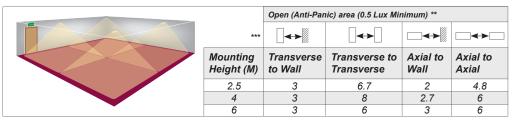

	Code	Lamp	Description
	ASWTLED/3M	LED	3W Maintained / Non-Maintained
Accessory	ASBP/1		3.6V 600mAh Ni-Cd Replacement Battery



