Merlin LED Emergency Downlight NonMaintained Open area 5W White





Description


Ultra-low profile recessed self-test emergency downlight.

Self-test as standard.

Option of escape route or open area models. High specification optic design and performance allows increased spacing providing reduced cost. Up to 17.8 metres spacing between luminaires.

Code	Description	Lamp
AMELED/OA/3NM/ST	5W	
IP20		YEAR



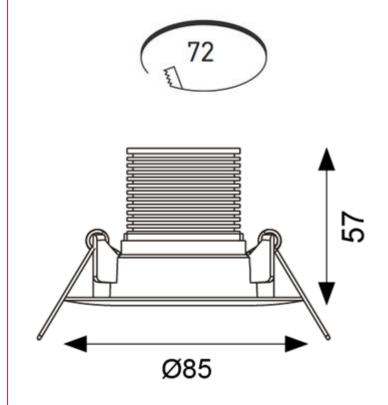

www.anselluk.com Warrington: +44 (0) 1942 433333 Belfast: +44 (0) 2890 773750