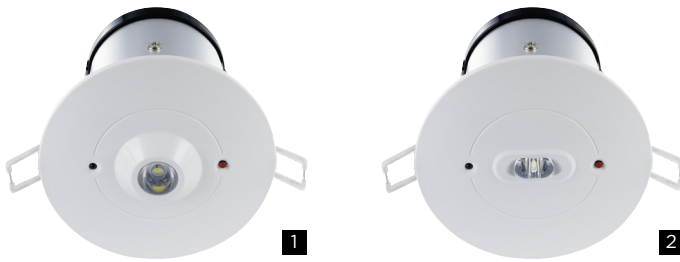


"All in One" Emergency Downlight

- Non Maintained 3hrs Emergency Downlight
- Battery and driver/inverter integrated in the can for fast installation
- Ultra-low power consumption
- Test button function for fast check

Product Code	IP Rating	Watts (TCW)	LED Power (W)	Temp K	Lumens lm	Cut out	Application	Dimensions	Pic.
"All in One"								3 year warranty*	
Non-Dimmable									
IEMDL003	IP20	1	2	6000	115	Ø 85	Open areas	Ø 110 x H: 110 mm	1
IEMDL004	IP20	1	2	6000	110	Ø 85	Corridors / Escape routes	Ø 110 x H: 110 mm	2

Compact Emergency Downlight

- Non-maintained 3hrs Emergency Downlight
- Ultra-small design for a seamless fit
- Plug & Play connection for easy installation
- Ultra-low power consumption: ONLY 1W stand-by

Product Code	IP Rating	Watts (TCW)	Temp K	Lumens lm	Application	Cut out	Dimensions mm	Pic.
Compact Emergency Downlight								3 year warranty*
Non-Dimmable								
IEMDL005	IP20	1	4000	100	Open areas	32 mm	Ø 36 x H: 10.5 mm	
IEMDL014	IP20	1	4000	180	Corridors / Escape routes	32 mm	Ø 36 x H: 10.5 mm	4



Product Code	Description	3 year warranty*	Dimension mm	Pic.
Accessories				
ILEMPK010**	2.5W 3hr Emergency Kit (Kit is rated IP20)		250 x 60 x 32 mm	5

*See warranty T&C on www.integral-LED.com

**Suitable for Integral panels and Fire Rated Downlights

For the full specification go to www.integral-LED.com