

ATURWOLED/230

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced

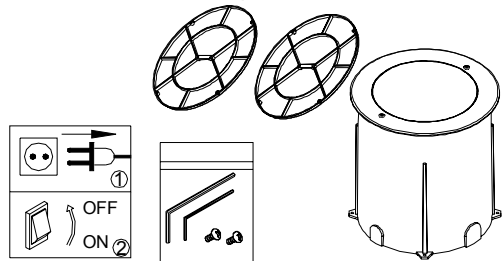


FIG-1
Installation place

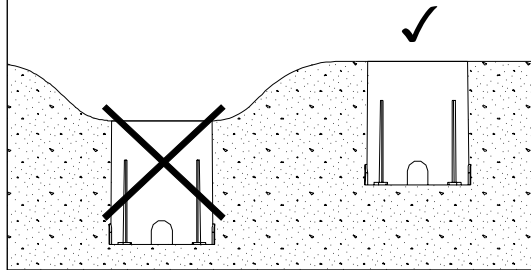


FIG-2




FIG-3

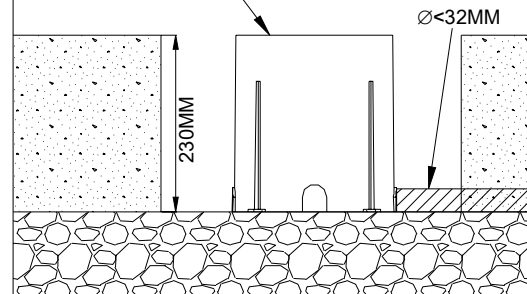
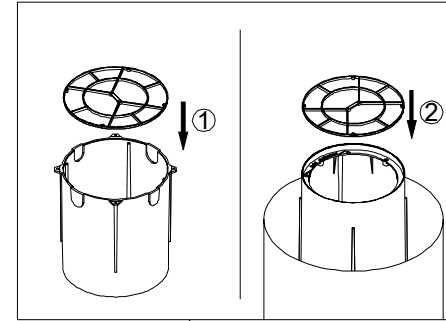


FIG-4

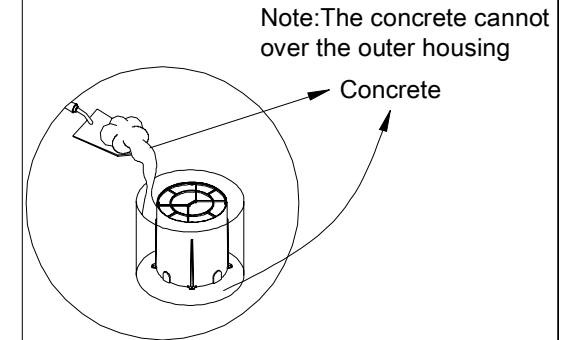


FIG-5

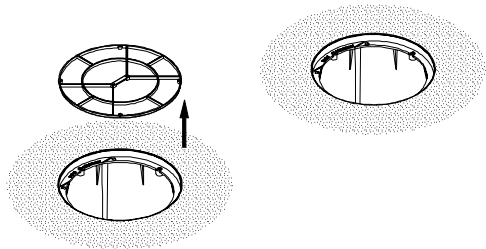


FIG-7

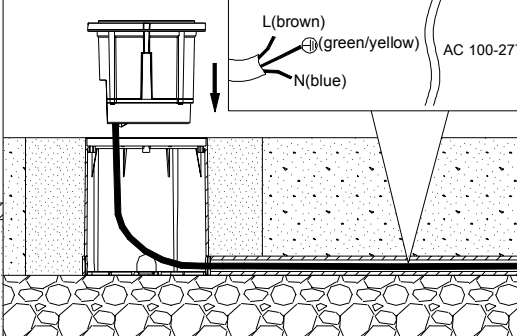
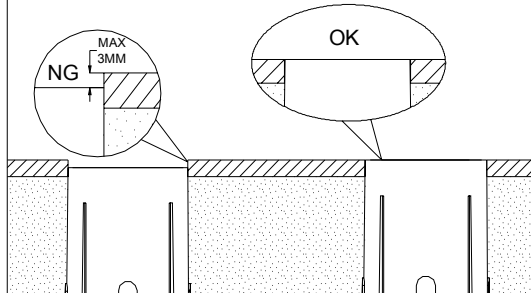


FIG-8





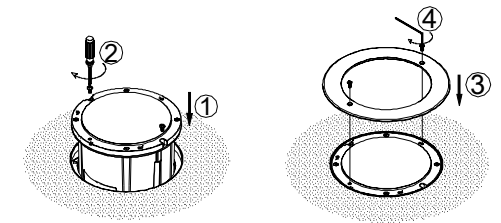


FIG-6

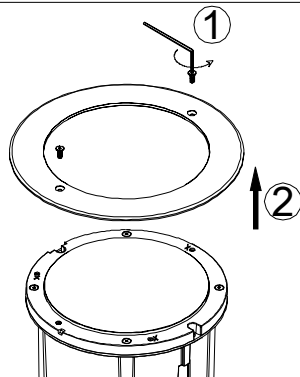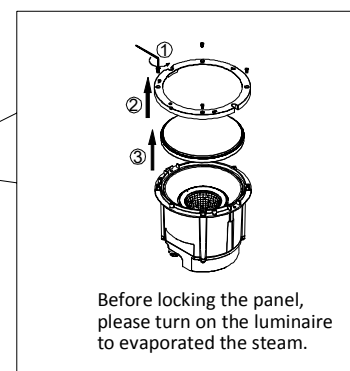

The housing can be adjusted by twisting the hexagon screw of the housing, making the housing balanced with the floor.
The height can be adjusted 1-3mm.

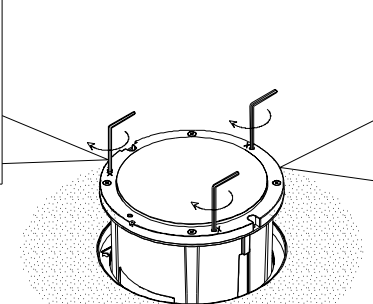

Before locking the panel, please turn on the luminaire to evaporated the steam.

FIG-9

