
# astro



# PRODUCT SPECIFICATION

#### **GENERAL**

White FINISH: CABLE LENGTH: Not Applicable Metal - Mild Steel MAIN MATERIAL: **GROSS WEIGHT:** 0.479 (kg) **DIMENSIONS:** Dia: 100mm D: 152mm CLASS: CE (Class I) Ceiling Mount IP20 INSTALLATION ORIENTATION: IP RATING:

CUT OUT HOLE: 92mm/3-5/8in BATHROOM ZONE: Zone 3

RECESS DEPTH: 170 (mm) VOLTAGE: Mains 230 (V)

FIRE RATING: 90 min PRODUCT F MARK: Not Suitable for mounting

on flammable materials. Not suitable for covering with thermal insulation.

#### LAMP

LIGHT SOURCE: GU10 MACADAM ELIPSE: Not Applicable

MAXIMUM WATTAGE: 50W Max UGR: To Be Advised

MAXIMUM LAMP LENGTH: 59 (mm) BEAM ANGLE: Lamp Dependent

LAMP INCLUDED? No **TILT ADJUSTMENT ANGLE:** 20 (Degrees) **LUMINOUS FLUX:** Lamp Dependant **ROTATION ADJUSTMENT ANGLE:** 360 (Degrees) **COLOUR TEMP:** AVERAGE LIFESPAN: Lamp Dependant Lamp Dependant CRI: Lamp Dependant L70: Not Applicable

R9: Lamp Dependant

### ELECTRICAL


SWITCHED:NoSUPPLY FREQUENCY:Not ApplicableDIMMABLE:YesDRIVER/BALLAST VOLTAGE:Not ApplicableDIMMING METHOD:Lamp DependantDRIVER AVERAGE LIFESPAN:Not Applicable


DRIVER OUTPUT CURRENT:Not ApplicableEFFICACY:Lamp DependantDRIVER OUTPUT VOLTAGE:Not ApplicableDRIVER/BALLAST INCLUDED?Not Applicable

## ADDITIONAL INFORMATION

**BOX QUANTITY X18** 

Œ

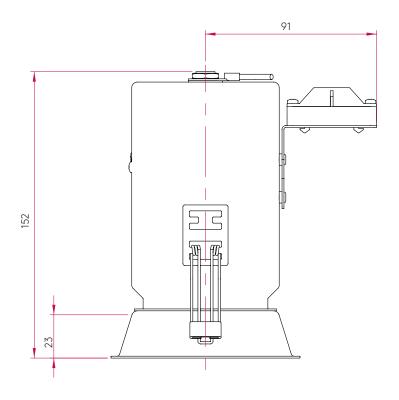

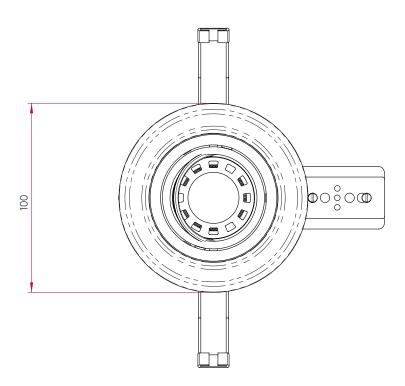

T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com