MONTPARNASSE 0484 SKU 1096001

astro



PRODUCT SPECIFICATION

GENERAL

blished Nickel letal - Zinc :330mm W:205mm D: 240mm (all Mount - Vertical ot Applicable ot Applicable ot Applicable 27/ES DW Max :5mm / 6.10″ o amp Dependent	CABLE LENGTH: GROSS WEIGHT: CLASS: IP RATING: BATHROOM ZONE: VOLTAGE: PRODUCT F MARK: MACADAM ELIPSE: UGR: BEAM ANGLE: TILT ADJUSTMENT ANGLE:	Not Applicable 3.1(kg) CE (Class I) IP44 Zone 1, 2, 3 Mains 230 (V) Suitable for mounting on flammable material Not Applicable Not Applicable Not Applicable Not Applicable
2330mm W:205mm D: 240mm (all Mount - Vertical ot Applicable ot Applicable ot Applicable 27/ES 28//ES 29/ Max 25mm / 6.10" o	CLASS: IP RATING: BATHROOM ZONE: VOLTAGE: PRODUCT F MARK: MACADAM ELIPSE: UGR: BEAM ANGLE: TILT ADJUSTMENT ANGLE:	CE (Class I) IP44 Zone 1, 2, 3 Mains 230 (V) Suitable for mounting on flammable materia Not Applicable Not Applicable Not Applicable
/all Mount - Vertical ot Applicable ot Applicable ot Applicable 27/ES DW Max 55mm / 6.10″ o	IP RATING: BATHROOM ZONE: VOLTAGE: PRODUCT F MARK: MACADAM ELIPSE: UGR: BEAM ANGLE: TILT ADJUSTMENT ANGLE:	IP44 Zone 1, 2, 3 Mains 230 (V) Suitable for mounting on flammable material Not Applicable Not Applicable Not Applicable
ot Applicable ot Applicable ot Applicable 27/ES DW Max 55mm/6.10″ o	BATHROOM ZONE: VOLTAGE: PRODUCT F MARK: MACADAM ELIPSE: UGR: BEAM ANGLE: TILT ADJUSTMENT ANGLE:	Zone 1, 2, 3 Mains 230 (V) Suitable for mounting on flammable material Not Applicable Not Applicable Not Applicable
ot Applicable ot Applicable 27/ES DW Max 55mm / 6.10" o	VOLTAGE: PRODUCT F MARK: MACADAM ELIPSE: UGR: BEAM ANGLE: TILT ADJUSTMENT ANGLE:	Mains 230 (V) Suitable for mounting on flammable material Not Applicable Not Applicable Not Applicable
ot Applicable 27/ES DW Max 55mm / 6.10″ o	PRODUCT F MARK: MACADAM ELIPSE: UGR: BEAM ANGLE: TILT ADJUSTMENT ANGLE:	Suitable for mounting on flammable material Not Applicable Not Applicable Not Applicable
27/ES DW Max 55mm/6.10″ o	MACADAM ELIPSE: UGR: BEAM ANGLE: TILT ADJUSTMENT ANGLE:	on flammable material Not Applicable Not Applicable Not Applicable
DW Max 55mm/6.10″ 0	UGR: BEAM ANGLE: TILT ADJUSTMENT ANGLE:	Not Applicable Not Applicable
DW Max 55mm/6.10″ 0	UGR: BEAM ANGLE: TILT ADJUSTMENT ANGLE:	Not Applicable Not Applicable
5mm/6.10″ o	BEAM ANGLE: TILT ADJUSTMENT ANGLE:	Not Applicable
0	TILT ADJUSTMENT ANGLE:	
		Not Applicable
amp Dependent		
	ROTATION ADJUSTMENT ANGLE:	Not Applicable
amp Dependent	AVERAGE LIFESPAN:	Lamp Dependent
amp Dependent	L70:	Not Applicable
amp Dependent		
0	SUPPLY FREQUENCY:	Not Applicable
25	DRIVER/BALLAST VOLTAGE:	Not Applicable
amp Dependent	DRIVER AVERAGE LIFESPAN:	Not Applicable
ot Applicable	EFFICACY:	Lamp Dependent
ot Applicable	DRIVER/BALLAST INCLUDED?	Not Applicable
0 0 0 0	mp Dependent mp Dependent mp Dependent t Applicable t Applicable	mp Dependent L70: mp Dependent SUPPLY FREQUENCY: s DRIVER / BALLAST VOLTAGE: mp Dependent DRIVER AVERAGE LIFESPAN: t Applicable EFFICACY:


ADDITIONAL INFORMATION

ONEROUS ENVIRONMENTS

All of our exterior products are covered by a 3 year guarantee; however this does not apply to any that are installed within 5 miles of the coast. For these environments, please filter products on the Astro website by "Coastal".



BOX QUANTITY X4

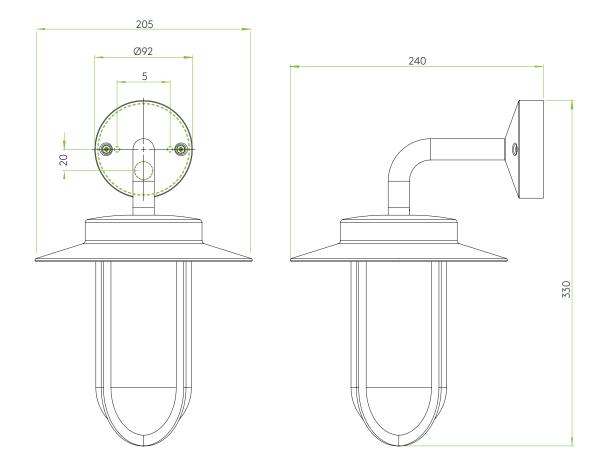

sales@astrolighting.com