
- Compact and economic polycarbonate LED floodlight
- Warm and Cool white options
- 30W LED comparable light output of 35W HQI
- 50W LED exceeds performance of 70W HQI
- Polished faceted reflector and textured glass for optimum performance
- Pre-wired with 1 metre of rubber insulated cable for ease of installation
- PIR versions complete with manual override facility
- LED lifespan L70 30,000 hours
- Non-dimmable



LED Information

LED IIIIOIIIIauoii					
	Cool White	Warm White			
Total (Watts)	30W				
		50W			
Lumens Delivered					
30W	2614lm	2415lm			
50W	4698lm	4198lm			
Lm/W 30W	90lm	83lm			
Lm/W 50W	94lm	84lm			
CRI		Ra 70			
CCT		4000K			
		3000K			
Input		230V			
Hertz		50Hz			
Operating Tem	qı	-10°C to 40°C			

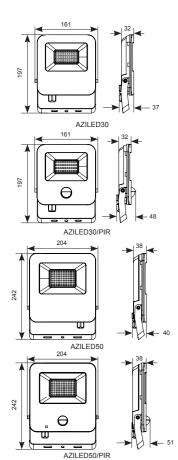

Zion LED Polycarbonate Floodlight Supplied c/w Integral Driver







10 Seo nds - 8 Minutes 3 Lux - PC Off



AZILED/30







AZILED/50



AZILED/50/PIR

	Code	Lamp	Description
Standard	AZILED30	LED	30W - Cool White
PIR	AZILED30/PIR	LED	30W c/w PIR - Cool White
Standard	AZILED50	LED	50W - Cool White
PIR	AZILED50/PIR	LED	50W c/w PIR - Cool White
Standard	AZILED30/WW	LED	30W - Warm White
PIR	AZILED30/WW/PIR	LED	30W c/w PIR - Warm White
Standard	AZILED50/WW	LED	50W - Warm White
PIR	AZILED50/WW/PIR	LED	50W c/w PIR - Warm White