

Girona

Panel heater

Controls

Digitally controlled electronic thermostat accurate to (+/-0.2°C).

Timer Modes: 7 Day Programmable User Timer.

Pre-programmed Timer Modes: Out All Day, Home All Day, Away.

Continuous Heat Modes: Eco, Manual, Frost Protect, Setback, Runback, Off.

- Graphical display with RGB backlight
- Capacitive buttons with audio feedback
- User replaceable battery (coin-type)

Controller Functions

- Open window detection
- Adaptive start
- Advanced time period for timer operation
- Adjustable max set point range (7-32°C)
- Bluetooth for software updates
- Child lock & Landlord lock (PIN-based)

Safety Features

- Thermal cut-out. Auto reset type
- Overheat detection

Colour/Finish

Metal Chassis, Air Outlet Grille & Control Moulding – Traffic White (RAL9016) on WE models, black on BE models.

Element

Compact, finned, mineral filled sheathed element.

Supply


- 1.3 metres fitted, 3 core for fused spur installation
- 1/N/PE ~230-240V, 50Hz Class I with earth wire

Guarantee

2 year UK manufacturer Guarantee.

IP Rating

IP24

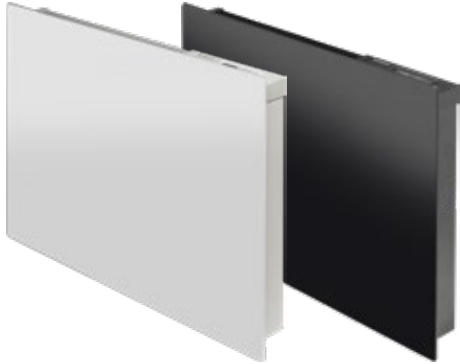


Intertek



Dimplex Control
See page 10 for details

Product Dimensions

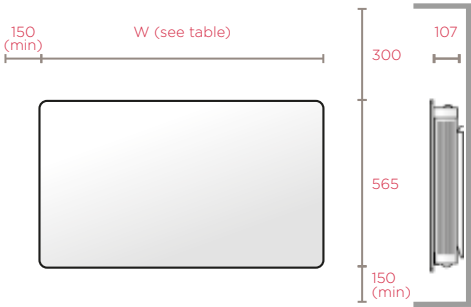

Model	Output (kW)	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
GFP050WE	0.50	565	530	107	13.4
GFP075WE	0.75	565	530	107	13.4
GFP100WE	1.00	565	700	107	16.9
GFP150WE	1.50	565	770	107	18.6
GFP200WE	2.00	565	940	107	22.1
GFP050BE	0.50	565	530	107	13.4
GFP075BE	0.75	565	530	107	13.4
GFP100BE	1.00	565	700	107	16.9
GFP150BE	1.50	565	770	107	18.6
GFP200BE	2.00	565	940	107	22.1

Monterey

Panel heater

Controls

Digitally controlled electronic thermostat accurate to (+/-0.2°C).

Timer Modes: 7 Day Programmable User Timer.

Pre-programmed Timer Modes: Out All Day, Home All Day, Away.

Continuous Heat Modes: Eco, Manual, Frost Protect, Setback, Runback, Off.

- Graphical display with RGB backlight
- Capacitive buttons with audio feedback
- User replaceable battery (coin-type)

Controller Functions

- Open window detection
- Adaptive start
- Advanced time period for timer operation
- Adjustable max set point range (7-32°C)
- Bluetooth for software updates
- Child lock & Landlord lock (PIN-based)

Safety Features

- Thermal cut-out. Auto reset type
- Overheat detection

Colour/Finish

Metal Chassis, Air Outlet Grille & Control Moulding – Traffic White (RAL9016).

Element

Compact, finned, mineral filled sheathed element.

Supply

- 1.3 metres fitted, 3 core for fused spur installation
- 1/N/PE ~230-240V, 50Hz Class I with earth wire

Guarantee

2 year UK manufacturer Guarantee.

IP Rating

IP24




Intertek



Dimplex Control
See page 10 for details

Product Dimensions

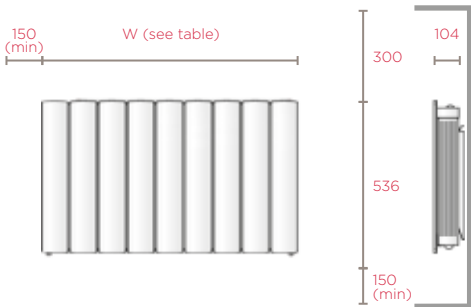

Model	Output (kW)	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
MFP050E	0.50	536	503	104	11.3
MFP075E	0.75	536	503	104	11.3
MFP100E	1.00	536	671	104	14
MFP150E	1.50	536	741	104	15.4
MFP200E	2.00	536	911	104	18.3