


Electrak® 26 powertrack / underfloor busbar system

dual circuit system (dark green)

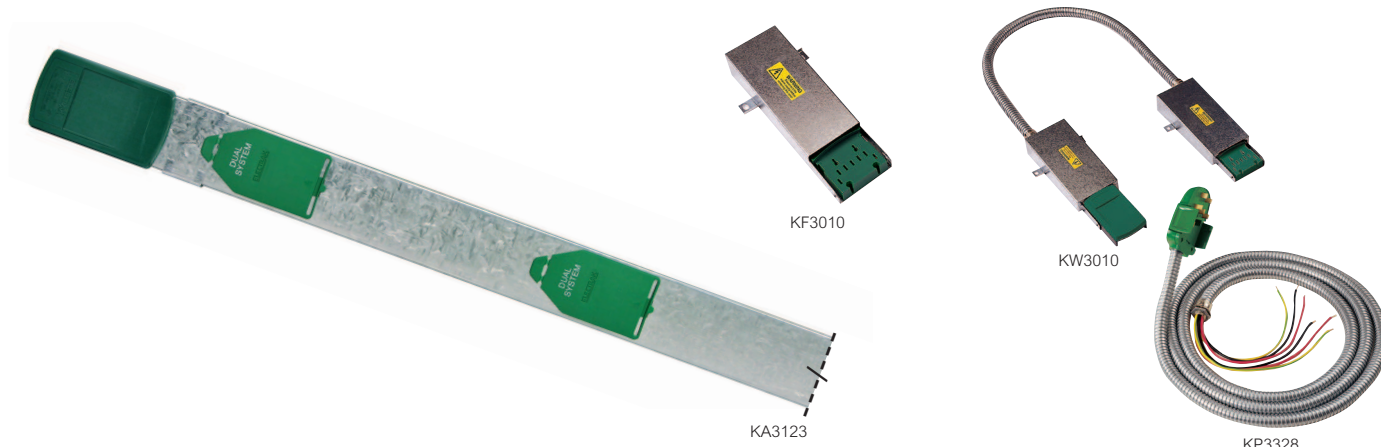

Selection charts **p. 8-9**
Dimensions and technical information **p. 17-21**

Approved to ASTA Standard 138 and ISO 9001 : 2008

Conforms to BS EN 60439-2 : 2008. Fully complies with the requirements of BS 7671 : 2008 IEE Wiring Regulations

A compact system that can be installed in floor voids as low as 48 mm

Pack	Cat. Nos.	Track system components	Pack	Cat. Nos.	Tap-off units
		The dual power track system has both standard and low noise / clean earth systems incorporated			Tap-off length is determined by the cable and not the conduit length, e.g. a 3 m tap-off has 3 m of cable and 2.6 m of flexible metal conduit ¹
		Electrak 26 dual circuit track lengths			Tap-off units in excess of 3 m should only be used if they contain a fuse or if the power track is protected by a protective device not exceeding 32 A
		Track lengths fit together using the integral connectors on each length			Standard 32 A unfused
		Track lengths should always be secured using the integral floor fixing brackets			16 mm Ø, L, N, PE
		300 mm socket centres			
1	KA3123	1.2 m, 4 outlets, 2 floor fixing brackets	1	DP1332	3 m
1	KA3183	1.8 m, 6 outlets, 2 floor fixing brackets	1	DP1532	5 m
1	KA3243	2.4 m, 8 outlets, 2 floor fixing brackets			Standard 13 A fused
1	KA3363	3.6 m, 12 outlets, 3 floor fixing brackets			16 mm Ø, L, N, PE
		Track feed unit			
1	KF3010	With two 25 mm diameter holes suitable for MICC, armoured cables or single core cables in conduit	1	DP1313	3 m
		Flexible interlinks	1	DP1513	5 m
		Can be used to overcome obstructions or as corners where required			Standard 13 A 543.7 fused
1	KW3000	Excluding cables and conduit	1	DP1327	3 m
1	KW3010	1.2 m flexible metal conduit	1	DP1527	5 m
1	KW3020	2.4 m flexible metal conduit			Low noise / clean earth 32 A unfused
		Special fixing brackets			16 mm Ø, CE, L, N, PE
		Required when track is raised off surface level			
		Brackets raise track by 21 mm and should be spaced 600 mm apart	1	JP2332	3 m
1	DZ1210	For fitting under track body and track feed	1	JP2532	5 m
1	DZ1230	For fitting under integral track connectors			Low noise / clean earth 13 A fused
					16 mm Ø, CE, L, N, PE
			1	JP2313	3 m
			1	JP2513	5 m
					Low noise / clean earth 13 A 543.7 fused
					16 mm Ø, CE, L, N, PE
			1	JP2327	3 m
			1	JP2527	5 m
					Dual circuit 32 A unfused
					20 mm Ø, CE, L1, N1, L2, N2, PE
			1	KP3328	3 m
			1	KP3528	5 m

¹ : Tap-offs are supplied as standard with flexible metal conduit
For alternative wiring solutions, contact us on +44 (0) 845 600 6266