


# YALE

A robust fitting for surface or suspended use



WIRE SUSPENSION KIT AVAILABLE  
AS AN ADDITIONAL ITEM

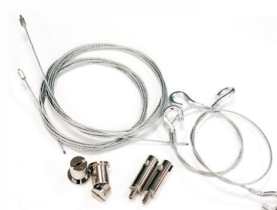

## APPLICATIONS

- Corridors and public areas in schools, colleges and public sector buildings
- For surface or suspended installation

## CONSTRUCTION

- Robust steel and polycarbonate construction
- Steel body, white gloss powder coated finish
- UV stable polycarbonate controller and end-caps
- LEDs on metal core PCB

## TECHNICAL DETAILS

- 150 lm/W
- 3 sizes available
  - 4', 44W, 4,302 lm, 95 l.m/c.W
  - 5', 54W, 5,825 lm, 108 l.m/c.W
  - 6', 66W, 6,865 lm, 103 l.m/c.W
- CRI >80
- CCT 4000K
- 12% uplight, 88% downlight
- Branded ENEC approved flicker free driver
- Emergency maintained 3 hrs versions (suffix M3) available


## OPTIONS

**SPECIALIST EMERGENCY** Self-Test Emergency (Suffix STM3) or DALI Addressable Emergency (Suffix DAM3) options available.

**DIMMING** DD (DALI or Switch Dim) or CF (Corridor Function) available. Add suffix DD or CF as required.

**SENSORS** Available with microwave sensor fitted to gear tray. Add suffix MW.

**EXTRAS** Tamper resistant screws and wire suspension kits available to be ordered as separate items as listed.

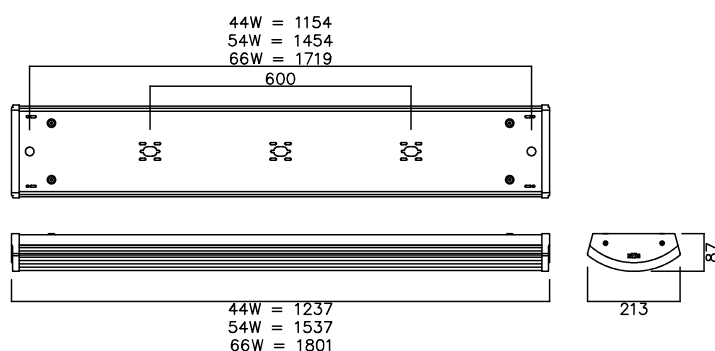

ORDER CODE	DESCRIPTION
NYA44LED/840	Yale 44W LED 4Ft Surface Mount 840
NYA44LED/M3L/840	Yale 44W LED 4Ft Surface Mount M3 Lithium 840
NYA54LED/840	Yale 54W LED 5Ft Surface Mount 840
NYA54LED/M3L/840	Yale 54W LED 5Ft Surface Mount M3 Lithium 840
NYA66LED/840	Yale 66W LED 6Ft Surface Mount 840
NYA66LED/M3L/840	Yale 66W LED 6Ft Surface Mount M3 Lithium 840
ACCESSORIES	
NYA/SCREWS/VANDAL/PK4	Yale Screws Vandal Resistant Screws Pack of 4
NYA/WIRE/SUSP/KIT	Yale Wire Suspension Kit 1.5m

# YALE

A robust fitting for surface or suspended use



## Designed to withstand tough environments

YALE is IK10 rated. The end caps are secured to the heavy-duty steel body with stainless steel screws and the controller is made of high-impact polycarbonate.