

AGAMLED/CCT/M3

Gamma LED CCT Emergency 17W



Features

Ultra slim modern polycarbonate wall/ceiling light

Matt white finish to body and diffuser

One product provides both 3000K and 4000K colour temperature options

Rear fixing bracket and terminal housing for ease of installation

Exceeds performance of 38W TC-DD

IP54 rating and suitable for bathroom use

LED lifespan L70 54,000 hours

Non-dimmable



Belfast: +44 (0) 2890 773750

General Information

| Matt White |
|---------------------|
| Yes |
| IP54 |
| 2 |
| 2 |
| Internal / External |
| Surface |
| 3 |
| Yes |
| 296 |
| 53 |
| AGAMLEDBZ/CH |
| |

Technical Information

| Wattage | 17W |
|------------------|--|
| Lumens Delivered | 1846lm (Cool White), 1681lm (Warm White) |
| Lm/W | 109m (Cool White), 99lm (Warm White) |
| CRI | Ra 80 |
| сст | 3000/4000K |
| Input | 230V |
| Hertz | 50Hz |
| Operating Temp | -5°C to 35°C |




Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

| Suitable for wall mounting | Yes |
|---------------------------------|-------------|
| Suitable for suspended mounting | No |
| Suitable for ceiling mounting | Yes |
| Suitable for built-in mounting | No |
| Suitable for surface mounting | Yes |
| With light source | Yes |
| Suitable for number of lamps | 1 |
| Material housing | Plastic |
| Colour housing | White |
| Nominal voltage | 230-230 V |
| Control gear included | Yes |
| No dim function | Yes |
| Degree of protection (IP) | IP54 |
| Protection class | II |
| Suitable for emergency lighting | Yes |
| With movement sensor | No |
| With light sensor | No |
| Max. system power | 17 W |
| Colour of light | White |
| Colour temperature | 3000-4000 K |
| Colour rendering index CRI | 80-89 |
| Height/depth | 53 mm |
| Length | 296 mm |
| | |

Datasheet generated from https://onetimepim.com last updated Tuesday, June 23, 2020 10:33:26 AM



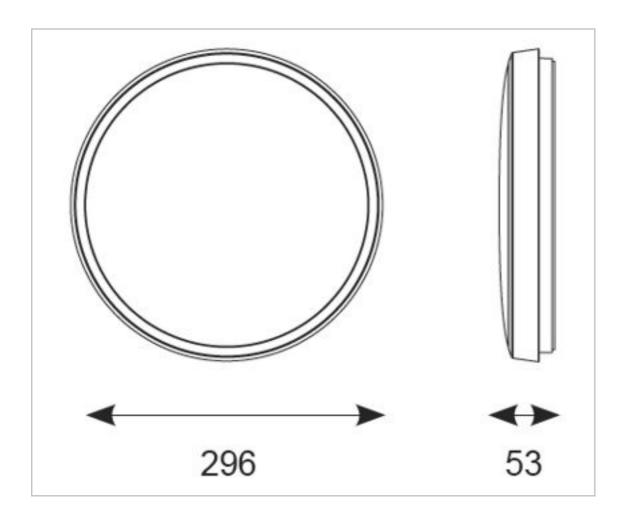

Belfast: +44 (0) 2890 773750