


Surge Protected High Integrity Consumer Unit

**NEW
PRODUCT!**

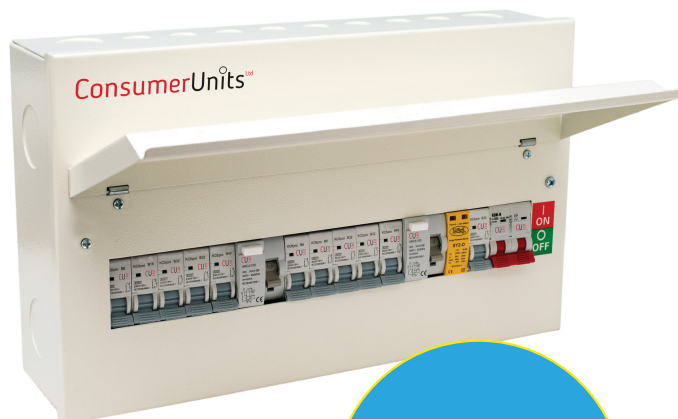

**AVAILABLE
NOW!**

Part No. CUL552HI

Suitable for
TNC-S, TN-S
& TT



- 10 way consumer unit with 100A main switch
- 10 x 6kA MCB's Type B included: 3 x 6A, 2 x 16A, 4 x 32A and 1 x 40A
- Fully compliant to all parts of the BSEN61439 series
- Fully compliant to the 18th edition of the wiring regulations
- Non-combustable, metal clad consumer unit fully compliant to BSEN61439-3
- Knockouts on top, bottom rear and both sides
- Integrated spirit level for a quick and easy installation
- Lot's of space inside for easy wiring
- Numbered N/PE terminals with colour coding
- Earth and Neutral terminal block is easily removed by pressing the fixing clip on both side (patented)
- Comes complete with a Type 2 surge device fed from a 32A MCB
- The surge device is suitable for all types of earthing arrangements (TN-S, TNC-S, PME & TT)
- The SPD has status indication on both live and neutral parts
- The SPD has pluggable, replacement modules for ease of replacement
- The SPD comes with a 10 year guarantee

Rated operational voltage	Ue	230V AC
Rated insulation voltage	Ui	500V AC
Rated impulse withstand voltage	Uimp	4kV
Rated current of the ASSEMBLY	InA	100A
Rated frequency	fn	50Hz
Pollution degree		2
Degree of protection		IP30
Mechanical impact protection		IK05
Standard in conformity with		BS EN 61439-3
Part number		CUL552HI