



Decorative Weatherproof Range



20 Amp 20AX Switches

- IP66 rated
- Stylish stainless steel face plate on a polycarbonate housing and black mounting box
- Hex style cover fixing screws – key supplied
- Switches manufactured to BS EN 60669-1
- Terminal capacity 4x 1.0mm², 4x 1.5mm², 2x 2.5mm² & 1x 4.0mm²
- Captive terminal screws
- Blue LED indicator that can be wired to illuminate when off or on



WPL42

WPL12

Product Code	Description	Inner Carton	Outer Carton
WPL12	Single, 2 way	-	24
WPL42	Double, 2 way	-	24

13 Amp Socket Outlet

- IP66 rated with plug in use, cover sealed
- Stylish stainless steel face plate on a polycarbonate housing and black mounting box
- 13A sockets manufactured to BS 1362-2
- Switched sockets with blue LED power indicator
- Socket terminal capacity 3x 2.5mm², 3x 4.0mm² & 2x 6.0mm²



WPL21

WPL22

Product Code	Description	Inner Carton	Outer Carton
WPL21	Single, 13 Amp, double pole switched	-	18
WPL22	Double, 13 Amp, double pole switched	-	12

13 Amp RCD Protected Socket Outlet

- IP66 rated with plug in use, cover sealed
- Cuts off power safely and prevent electrocution in event of a fault
- Latching operation, socket returns to original state when power resumes
- 8 versatile entry options with M25 capability and easy push out blank plug design
- Stylish stainless steel face plate on a polycarbonate housing and black mounting box
- Switched sockets with blue LED power indicator
- Manufactured to BS 7288
- RCD 30mA trip current, 40ms speed
- Socket terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²




WPL22RCD closed lid

WPL22RCD

Product Code	Description	Inner Carton	Outer Carton
WPL22RCD	Double, 13 Amp, RCD switched (latching)	-	12



Storm Weatherproof Range

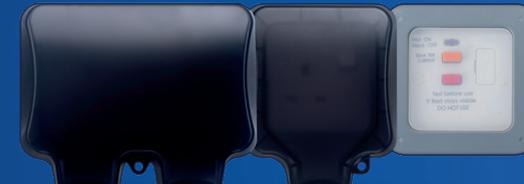

20 Amp 20AX Switches - Slim

- IP66 rated
- Narrow weatherproof switches
- Customer configurable – switch modules can be interchanged with others from the Grid range
- Captive terminal screws
- Switches manufactured to BS EN 60669-1
- Terminal capacity 4x 1.0mm², 4x 1.5mm², 2x 2.5mm² & 1x 4.0mm²



WP12S

WP14S

Product Code	Description	Inner Carton	Outer Carton
WP12S	Single, 2 way	10	100
WP14S	Single, 1 way retractive, printed "PRESS"	10	100

20 Amp 20AX Switches

- IP66 rated
- Captive terminal screws
- Switches manufactured to BS EN 60669-1
- Terminal capacity 4x 1.0mm², 4x 1.5mm², 2x 2.5mm² & 1x 4.0mm²
- Supplied with multiple knock-out mounting box
- Indicator that can be wired to illuminate when off or on




WP12

WP42

Product Code	Description	Inner Carton	Outer Carton
WP12	Single, 2 way	-	10
WP42	Double, 2 way	-	10
WP14	Single, 2 way retractive, printed "PRESS"	-	10
WP30	Single, double pole	-	10

13 Amp Switched Socket Outlets

- IP66 rated with plug in use, cover sealed
- 13A sockets manufactured to BS 1363-2
- Switched sockets with power indicator
- Terminal capacity 3x 2.5mm², 3x 4.0mm² & 2x 6.0mm²
- Supplied with multiple knock-out mounting box

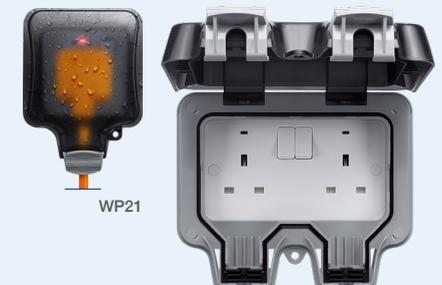

WP21

WP22

Product Code	Description	Inner Carton	Outer Carton
WP21	Single, 13 Amp, switched	-	10
WP21ES	Single, 13 Amp, with external switch	-	10
WP22	Double, 13 Amp, switched	-	10